

**750 PAD ACCELERATED SOLAR POND SLUDGE REMOVAL SAFETY  
ANALYSIS  
A/B Pond Sludge Removal and Storage**

**Prepared by:**

**Allan C. Stalker  
Safety Analysis Engineering  
EG&G Rocky Flats, Inc.**

A handwritten signature in dark ink, appearing to read "Allan C. Stalker", is written over a horizontal line.

**Checked by:**

**Vern L. Peterson  
Safety Analysis Engineering  
EG&G Rocky Flats, Inc.**

A handwritten signature in dark ink, appearing to read "Vern L. Peterson", is written over a horizontal line.

**Approved by:**

**Don R. Swanson, Manager  
Safety Analysis Engineering  
EG&G Rocky Flats, Inc.**

A handwritten signature in dark ink, appearing to read "Don Swanson", is written over a horizontal line.

**Date:**

**December 15, 1993**

## 750 PAD ACCELERATED SOLAR POND SLUDGE REMOVAL SAFETY ANALYSIS A/B Pond Sludge Removal and Storage

### 1.0 INTRODUCTION

The accelerated solar pond sludge removal program will remove sludge from the solar ponds and store the sludge on the 750 Pad in 10000 gallon double walled polyethylene tanks. A minimum of 23 tanks will be required for the storage of the 207A/B Pond sludge. The 207A Pond, 207B North Pond, and 207B Center Pond sludge has already been pumped into the 207B South Pond. The sludge will be moved by sucking it into a 13 cubic meter (17 yd<sup>3</sup>) truck, driving the loaded truck into the tent containing the storage tank, and pumping the sludge into the tank. This operation will be continued until the 207B South Pond is empty.

### 2.0 DESCRIPTION OF EQUIPMENT

The vacuum truck is called the "Guzzler" and operates with a Dresser or Hargreaves Positive Displacement Vacuum Pump rated at 380 mm (15") of Hg and 5141 CFM at full vacuum. The truck has a 13 cubic meter (17 yd<sup>3</sup>) Cleanbore Body, designed for maximum separation of heavier materials from the air stream. The payload capacity is rated at 12.2 m<sup>3</sup> (16 yd<sup>3</sup>). It has four removable 16" top mounted centrifugal separators with easy-access clean-out ports to insure maximum separation of material and dust from air stream prior to the baghouse stage filtration. The baghouse has 60 acrylic coated filter bags with an automatic bag pulsing feature. It has a stainless screen fitted in the vacuum tube make-break connection as a fail-safe barrier to any pump damaging material.

The truck will be driven to the solar pond. The truck mounted suction hose will be attached to a boom mounted extension hose and collection wand at the solar pond. The truck will be loaded with 12.2 m<sup>3</sup> of sludge. When the truck is full the hose will be sucked empty. The boom extension will be disconnected and a cap will be installed for the trip to the 750 Pad. The truck will then be driven to the 750 Pad.

Each storage tank set will consist of a closed primary tank 13'6" in diameter inside of a 14' secondary open-top containment tank, with a maximum capacity of 11500 gallons. The working volume is 10000 gallons. Both tanks are constructed of high density crosslinked polyethylene. The wall thickness is calculated for the appropriate hoop stress for sludge up to a specific gravity of 1.9. A leak detection system is provided to detect leaks from the primary tank into the secondary containment tank. Twenty of these tank sets will be in Tent 3, 22 in Tent 4, and 29 tanks in Tent 6. The tanks will be located on both sides of the tent with sufficient aisle space between the tanks to drive the transfer truck.

The vacuum truck will be backed into the tent to the tank to be filled. A sludge pump, rated at 200 gpm maximum, will be connected to the polyethylene tank with a three inch line. It will take from 16 to 30 minutes to empty the truck into a tank. Each tank will be filled with approximately 10000 gallons of sludge. The truck will then be driven back to the solar pond for the next load.

### 3.0 ACCIDENTS

#### 3.1 DRAFT SAFETY ANALYSIS REPORT FOR THE 750 AND 904 PADS

A Draft Safety Analysis Report (SAR) for the 750 and 904 Pads Temporary Pondcrete and Saltcrete Storage Facilities was written with the expected waste form as pondcrete or saltcrete in half triple-wall body package (triwall box), half flush-panel plywood box (half box), full flush-panel plywood box (full box), and corrugated metal waste container (metal crate). The Hazard Classification for the facility was calculated based on a small airplane crash into the facility with the resultant release due to impact, fire, and entrainment release of hazardous chemicals and radionuclides. The facility was designated as Category 3. The total quantity of material involved was  $1.71 \times 10^7$  kilograms, with a total 80 kg of pondcrete released into the atmosphere. The chemical composition of the pondcrete was based on the 95th percentile of 19 samples analyzed for a variety of hazardous constituents for pondcrete produced from the 207A Pond.

Three bounding accidents were evaluated in the 750/904 Pads draft SAR for assessing the consequences of these accidents. They were:

- 1) A spill of  $5.12 \times 10^3$  kg of pondcrete over a five minute period releasing 0.034 kg of material to the atmosphere,
- 2) A 30 minute fire involving  $2.15 \times 10^5$  kg of pondcrete releasing 0.9 kg of material to the atmosphere, and
- 3) A 2 hour fire involving  $1.89 \times 10^6$  kg of pondcrete releasing 7.6 kg of material to the atmosphere.

Table 1 presents a summary of the results for the radiological and chemical hazard analysis calculations from the draft SAR.

#### 3.2 EARLY REMEDIATION OF SOLAR PONDS ACCIDENT ANALYSIS

Early remediation of the solar ponds will move the contents of the ponds to tanks installed inside of tents on the 750 Pad. The total quantity of A/B Pond sludge/water mixture that will be placed in storage on the 750 Pad is approximately  $1 \times 10^6$  kg. The sludge will occupy approximately 23 of the 10000 gallon storage containers.

The aircraft scenario used in the bounding SAR analysis was not repeated for the tanks of sludge. The estimated  $1 \times 10^6$  kg of total material in the tanks represents approximately 6-percent of the total material inventory (i.e.,  $1.7 \times 10^7$  kg) assumed to be involved

in the aircraft crash and ensuing fire. In addition, unlike pondcrete, the water content of the sludge would act to inhibit fire propagation. As a result of the placement of the tanks on the 750 Pad, the actual pondcrete capacity is diminished from that assumed in the SAR analysis, making the SAR analysis more conservative. Therefore, the plane crash into the pondcrete is judged to bound a crash into the tanks.

Two accidents are evaluated in detail to determine if the consequences are within those determined for the bounding accidents presented in the Draft SAR. They are:

- 1) The spill of the entire contents of one 10000 gallon container inside of the tent structure. This would involve up to  $4.2 \times 10^4$  kg of pond sludge releasing 0.04 kg to the atmosphere and
- 2) The spill of the entire contents of the vacuum truck onto the ground outside of the tent structure. This would involve  $1 \times 10^4$  kg of pond sludge releasing 0.01 kg to the atmosphere.

The results of the hazard analysis calculations are given in Table 1 for comparison with the Draft SAR calculations.

### 3.2.1 WASTE CHARACTERIZATION

Waste characterization for the Accelerated Sludge Removal Program is based on several reports as follows:

- 1) Pond Sludge Waste Characterization Report and Clarifier Sludge Waste Characterization Report for EG&G Rocky Flats Prepared by Halliburton NUS Environmental Corporation, March 1992
- 2) Weston Report
- 3) Options Analysis Report for the Accelerated Sludge Removal Project, Final Report, 234353GG Under MTS 225456RR, Prepared by ICF Kaiser Engineers, Inc. July 26, 1993.

The Weston and Halliburton chemical characterization data was treated together and a single conservative composition for each of the ponds, 207A, 207B-North, 207B-Center, and 207B-South was calculated. Since the sludge has now been all moved to the 207B-South pond a composite value is calculated based on the estimated sludge volumes for each pond. Since the A pond sludge has the highest concentration of hazardous materials, it is assumed, to be conservative, that all of the A Pond sludge can be placed in a single container (storage tank or vacuum truck) along with a composite of the three B Ponds to make up the balance of

the volume. These calculations are documented in Nuclear Safety Engineering Calculation 93-SAE-004.

All of the hazardous material concentrations calculated for the sludge in the A/B Ponds to be remediated are less than those concentrations that are used in the Draft SAR for the bounding calculations.

### 3.2.2 RELEASE FRACTIONS

Release fractions for the spilling of the material were taken from NUREG/CR-4658, "Aerosols Generated By Spills of Viscous Solutions and Slurries", Prepared by M. Y. Ballinger and W. H. Hodgson, December 1986. A least squares fit of the release fraction as a function of viscosity was performed and the data extrapolated to 105 centipoise, the estimated viscosity of the stored sludge. The value used is the calculated value at 105 centipoise plus two standard deviations. This release fraction is  $1.09 \text{ E-}6$ .

### 3.2.3 ATMOSPHERIC DISPERSION

Local worker exposure assumes that the released material is uniformly contained in 1000 cubic meters of atmosphere. This is about one-third of the free air space in Tent 3 or 4. The draft SAR used  $206 \text{ m}^3$  for the immediate worker dilution volume for the spill of  $4.2 \text{ yd}^3$  (850 gallons) of pondcrete, a much smaller volume of material.

A colocated worker is assumed to be 100 meters downwind under the most conservative meteorology conditions, F Stability Class with a wind speed of 1 meter/second. The maximum exposed individual off-site is assumed to be 1900 meters with the same meteorology.

In comparison, the draft SAR used 100-200 meter range for the on site worker and 2000-2100 meter range for the off-site public dose calculations using the MACCS computer code. For the three accident conditions analyzed the draft SAR used D stability class and 4 meters/second wind speed, which is less conservative. However, the draft SAR used F stability class and one meter/second wind speed for the Hazard Classification Calculations.

### 3.2.4 EXPOSURE CALCULATIONS

The aerosolized released fraction of material is assumed to occur instantaneously and persist for 15 minutes, allowing a peak 15 minute average concentration to be calculated. The concentration of each hazardous chemical is then compared to the threshold limit value - time weighted average (TLV-TWA) provided by the American Conference of Governmental Industrial Hygienists (ACGIH). The use of TLV-TWA is conservative for accident analysis purposes and is consistent with the methodology used in the Building 910 hazard

classification and SAR, which was approved by DOE. The TLV-TWA limits does not create any limitations for the 750 Pad operations and provides an additional margin of safety.

A safety fraction is calculated as the sum of the ratios of chemical concentration to the TLV-TWA. For public exposure one-tenth of the TLV-TWA was used in the calculation of the safety factor. These values are more conservative than those used in the draft SAR. The on-site worker and the public are assumed to be exposed to the hazardous material at the maximum concentration during the entire plume passage.

Radiological exposure is assumed to occur through inhalation of the radioactive material. The breathing rate for the exposed population from the draft SAR was used. Dose conversion factors were taken for specific radionuclides from the Federal Guidance Report No. 11, Limiting Values of Radionuclide Intake and Air Concentration and Dose Conversion Factors for Inhalation, Submersion, and Ingestion. Gross alpha was assumed to be composed of plutonium-239 and gross beta plutonium-241. Exposure was calculated as the committed effective dose equivalent (CEDE).

The results of these exposure calculations are shown in Table 1 and are within the bounding envelope calculated in the Draft SAR.

#### 4.0 CONCLUSIONS

The storage of sludge from the 207A/B ponds in tanks on the 750 Pad is within the safety envelope calculated for the storage of Pondcrete on the 750/904 Pads as presented in the Draft SAR.

TABLE 1  
COMPARISON OF DRAFT SAR ACCIDENT ANALYSIS WITH EARLY REMEDIATION OF  
SOLAR POND HAZARD ANALYSIS

	SAR Hazard Classification	SAR Accidents Evaluated			Early Remediation of 207 A/B Solar Ponds - 750 Pad	
		Fork Lift Spill	30 Minute Fire	2 Hour Fire	10000 Gallon Tank Spill Inside Tent	Truck Spill Outside Tent
Exposed Individual Hazardous Chemical Radiological						
Worker Toxic Exposure Safety Fraction	N/A	25.7 <sup>1</sup> 0.445 <sup>2</sup>	N/A	N/A	0.77	0.61
Worker Radiation Exposure Rem (CEDE)	N/A	0.106	N/A	N/A	6.3x10 <sup>-4</sup>	5.9x10 <sup>-4</sup>
On-site Worker Toxic Exposure Safety Fraction	0.63	0.069	0.0014	2.9x10 <sup>-12</sup>		0.035
On-site Worker Radiation Exposure Rem (CEDE)	0.0016	6x10 <sup>-6</sup>	3.6x10 <sup>-7</sup>	1x10 <sup>-13</sup>		3.4x10 <sup>-5</sup>
Off-site Person Toxic Exposure Safety Fraction	0.23	0.00048	8x10 <sup>-5</sup>	4.4x10 <sup>-17</sup>		0.0016
Off-site Person Radiation Exposure Rem (CEDE)	.00026	1.3x10 <sup>-7</sup>	1.5x10 <sup>-7</sup>	2.8x10 <sup>-16</sup>		1.6x10 <sup>-7</sup>

Note 1 - Fraction against ERPG2

Note 2 - Fraction against ERPG3

## **BASIS FOR INTERIM OPERATION 750/904 Pads**

### **INTRODUCTION**

The 750/904 Pad are interim status Resource Conservation and Recovery Act (RCRA) units for temporary storage of pondcrete and saltcrete waste forms. These facilities support the efforts to remediate and close the Rocky Flats Plant Solar Evaporation Ponds, Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) Operable Unit #4 (OU4).

Recent efforts to expedite closure of the solar ponds has identified the need to use the 750 Pad as the location for the installation of tanks which will contain the sludge and some liquids from the ponds.

A draft Safety Analysis Report (SAR) has been developed for this facility and has been reviewed and commented on by the Department of Energy, Rocky Flats Office (DOE-RFO). This draft SAR meets 5480.23 criteria and categorizes the facility as Hazard Category 3.

### **FACILITY DESCRIPTION**

The 750/904 Pad facilities consist of weatherproof fabric tents with arched aluminum frames. The tent structure are located on, and anchored to asphalt-paved areas. The perimeter of the Pad areas are bermed to collect drainage and runoff from the Pads. Pad modifications allow the storm water to be released to the storm sewer system. Primary facility systems include electrical power and lighting, propane fired heaters, and emergency communications.

Two type of storage operations will be used for the pads, cemented pond and salt sludge materials in containers and sludge and liquids stored in 10000 gallon tanks.

The cemented waste storage operations include receipt, staging, stacking, inspection, storage, and loading (onto shipment vehicle) of pondcrete and saltcrete material. Pondcrete and saltcrete are immobilized low-level mixed waste forms. Pondcrete is cemented sludge from the solar evaporation ponds (Ponds 207A; 207B north, center, and south; and 207C), which are no longer used as evaporation basins per the Interagency Agreement with the DOE, the U.S. Environmental Protection Agency (EPA), and the State of Colorado. Saltcrete is cemented nitrate salt residue from the dewatering/evaporation process at Building 374. Analytical sample data indicate the presence of trace amounts of volatile organic compounds; semi-volatile organic compounds; metals, including aluminum, beryllium, cadmium, chromium, lead, and mercury; and trace radioactive contaminants, including uranium-234, -235, -238, plutonium-239, americium-241, and tritium.

The liquid and sludge storage operation include the receipt, transfer, storage, and inspection of liquid or sludge material in 10000 gallon, double walled polyethylene tanks. The sludge materials originate from the 207A/B solar ponds as sludge or liquid materials.



## **SAFETY DOCUMENTATION/SAFETY ASSURANCE**

The 750/904 Pads were originally classified as a low hazard facility per DOE Order AL 5481.1A, which did not require a separate SAR at the time and it was also classified as a non-nuclear facility per DOE Order 5480.5. However, the 750/904 Pad hazards have been evaluated and documented in a draft SAR, which categorized the facility as Hazard Category 3, and meets the scope and content requirements of DOE Order 5480.23. This draft SAR has been reviewed by DOE-RFO. Resolution of outstanding issues and comments on this SAR are currently planned and budgeted for Fiscal Year 1994 (FY' 94). Continued operation of the facility in the interim until the SAR is finalized was justified in a letter from EG&G to DOE-RFO dated June 30, 1993. This justification was accepted by DOE in a letter to EG&G dated July 23, 1993. A Hazard Analysis for the Early Remediation of the Solar Ponds Project has concluded that the storage, in 10000 gallon tanks, of liquids and sludge taken from the 207A/B Ponds is within the safety envelope presented in the draft SAR.

The 750/904 Pads have specific health and safety plans. These plans address responsibilities, hazards, communications, site control, personnel protective equipment, decontamination, material handling, monitoring, training, and emergency response. In addition to the health and safety plans, Operational Safety Analyses and Job Safety Analyses have been performed for certain activities on the 750/904 Pads.

DOE conduct of operations requirements are implemented by the Conduct of Operation Manual. A Level of Applicability analysis performed for the 750/904 Pad operations determined that all Conduct of Operations Procedures are applicable.

With the restrictions mentioned above, the discussion in Section 4.3 of Appendix A is applicable to this building.

## **COMPLIANCE STATUS**

The draft SAR/TSRs for the 750/904 Pads has been developed in accordance with DOE Orders 5480.23 and 5480.22. The SAR will require revision in FY 94 to incorporate 1) review comments from DOE-RFO, 2) the installation of tanks for the accelerated solar pond sludge removal project, and 3) reanalysis to resolve issues associated with LCO limitations on combustible material inventories.

DOE has approved the funding of this effort and the resolution of the outstanding comments and issues should be accomplished in approximately 6 months.

## **SAFETY ANALYSIS**

The safety analyses performed for the 750/904 Pads is based on both qualitative and quantitative methods. Qualitative methods include OSAs, JSAs, and failure modes and effects analysis (FMEAs). Utilizing the results of the FMEAs, quantitative analyses were performed for those accidents of greater relative significance.

The 750/904 Pad is classified as a Hazard Category 3 nonreactor nuclear facility per DOE Order 5480.23. The hazard classification analysis considers a worst case bounding accident of an aircraft impact followed by fire. The design of the facility is such that no credit is taken for confinement. In addition to the hazard classification analysis, the SAR accident analysis considers spills, fire and explosions. The accident consequences were determined to be within DOE guideline for annual exposures for the immediate worker, the on-site worker, and the public.

#### **RESTRICTIONS ON INTERIM OPERATIONS**

The operational restrictions imposed by the letter justifying continued operation of the facility, as well as those imposed by the other programs discussed in Section 4.3 of Appendix A [of the Safety Analysis Program Implementation Plan], are being met.

#### **CONCLUSION**

The 750/904 Pad hazards have been evaluated and documented in a draft SAR, which categorizes the facility as Category 3, and meets the scope and content requirements of DOE Order 5480.23. This draft SAR has been reviewed by DOE-RFO. Resolution of outstanding issues and comments on this SAR are currently planned and budgeted for Fiscal Year 1994 (FY 94). Continued operation of the facility in the interim until the SAR is finalized was justified in a letter from EG&G to DOE-RFO, dated June 30, 1993. This justification was accepted by DOE in a letter to EG&G dated July 23, 1993. A Hazard Analysis for the Early Remediation of the Solar Ponds has concluded that the storage, in 10000 gallon tanks, of liquids and sludge taken from the 207A/B Ponds is within the safety envelope presented in the draft SAR.

# NUCLEAR SAFETY ENGINEERING CALCULATION COVER SHEET

Enclosure 1  
SRK-271-93  
Page 13 of 41

Sheet 1 of 28 Sheets

Title Hazard Calculation for Early Remediation of Solar Ponds

Building 207A/B Solar Ponds / 750 Pad.

Project WORK PACKAGE 12188 Calculation No. 93-SAE-004

Analyzed System \_\_\_\_\_ Supersedes Calculation No. \_\_\_\_\_

References \_\_\_\_\_

If Superseded, Give Superseding Calculation Number \_\_\_\_\_

## Calculation Objective/Summary Description

Provide Safety Analysis for the Accelerated Solar Pond Sludge Removal and Storage in Tanks on the 750 Pad Project.

## Computer Code

Dated Program Version \_\_\_\_\_

Operating System \_\_\_\_\_

Hardware Configuration \_\_\_\_\_

Rev. No.	Revision	Originator	Date	Checked By	Date	Approved By	Date
0	Original	<i>W.C. Stulken</i>	12/8/93	<i>Blaydel</i>	12/15/93	<i>Don Swanson</i>	12/15/93

## NUCLEAR SAFETY ENGINEERING CALCULATION TABLE OF CONTENTS

By *John C. Stalk* Date 12/15/93 Sheet 2 of 28 Sheets  
Calculation No. 93-SAE-004  
Checked By *Boyd* Date 12-15-93 Revision No. 0

Section	Sheet Number
Calculation Cover Sheet	<u>1</u>
Table of Contents	<u>2</u>
Objective of Calculation	<u>3</u>
Acceptance Criteria	<u>                    </u>
References	<u>                    </u>
Assumptions	<u>4, 23, 24, 27 &amp; 28</u>
Design Inputs	<u>                    </u>
Method and Equation Summary	<u>3</u>
Body of Calculation	<u>5-22, 26</u>
Results	<u>19, 20 &amp; 21</u>
Conclusions	<u>28</u>
Appendices (Letter/Title)	<u>                    </u>
<u>                    </u>	<u>                    </u>
<u>                    </u>	<u>                    </u>
<u>                    </u>	<u>                    </u>

**Additional Comments**

---

---

---

---

---

---

---

# GENERAL COMPUTATION SHEET

Enclosure 1

SRK-271-93

Page 15 of 41

Sheet 3 of 28 Sheets

☐ Calc. No. 93-SAE-004

Subject Hazard Calculations for Early Remediation of Solar Ponds.

By ACStallan Date 12/8/93 Chk. By Ruehl Date 12-15-93 Orig. ☒ Rev. ☐

## 1. Objective of Calculation

The objective of the calculation is to pull together the Halliburton NUS and Weston analytical data for the solar pond sludge and calculate the hazard for storing the material on the 750 pad in 10000 gallon tanks. These results will be compared to the 750 draft SAR accident calculations.

## 2. Methodology

a. Combine the Weston and NUS Halliburton sludge analytical data for the A/B ponds. The data consists of samples as follows:

A Pond Weston 1 composite sample  
NUS 1 sample

B N Pond Weston 4 Quadrant samples + 1 composite of 4 quadrants  
NUS 4 Quadrant samples

B C Pond Weston 4 Quadrant samples + 1 composite of 4 quadrants.  
NUS 4 Quadrant samples

B S Pond Weston 4 Quadrant samples + 1 composite of 4 quadrants  
NUS 4 Quadrant samples + 1 duplicate quadrat.

Weston

Calculate an average value for each pond  
 $((NE + NW + SE + SW)/4 + \text{composite})/2$

NUS  $(NE + NW + SE + SW)/4$  For duplicate calc average of one quadrat first

☐ Calc. No. 93-SAE-004

Subject Hazard Calculations for Early Remediation of Solar Ponds  
By A. C. Stuth Date 12/8/93 Chk. By Reyfel Date 12-15-93 Orig. ☒ Rev. ☐

Weston data is calculated in EXCEL Spreadsheet PSSABC.XLS.  
Hard copy is page 5 through 9 of this calculation.

Halliburton NUS data is calculated in EXCEL Spreadsheet NUSPSLG.XLS. Hard copy is page 10 through 14 of this calculation.

The data is combined in EXCEL SPREADSHEET SLCOMB2.XLS.  
Hard copy is page 15 through 18 of this calculation.

The average value calculated for each of NUS and Weston are compared and the larger used for the conservative calculation.

**NOTE.** LESS than (nondetectable data) are shown as **BOLD-UNDERLINED** data on the Weston (PSSABC.XLS) spreadsheet and **BOLD** data on the NUS (NUSPSLG.XLS) spreadsheet. They are coded as the less than value \* the less than multiplier. For samples in which a given analyte was not detected in any of the samples for a given pond the value was left blank. For analytes in which no detectable value was found in any sample the analyte was deleted from the final combination spreadsheet (SLCOMB2.XLS)

b. Sludge volumes for each of the four Ponds A, BN, BC, & BS were given as: Band on Brown & Root Calculations per J.H. Templaton

A	2181 gallons	which is	8255 liters
BN	87424	"	330900 liters
BC	91139	"	345000 liters
BS	48026	"	181860 liters

These values are used in EXCEL SPREADSHEET SLCOMB2.XLS to calculate a total conservative inventory for each of the analytes for each of the four ponds.

NEXT TEXT ON PAGE 23

By <u>MC Stalko</u> Date <u>12/15/93</u> Chk. By <u>Rayford</u> Date <u>12.25.93</u>							
Less than multiplier = 1		Weston Solar Pond Sludge Data					
Analyte	207A-CP-SL	207A	207BN-SW-SL	207BN-SE-SL	207BN-NE-SL	207BN-NW-SL	207BN-CP-SL
	mg/kg	KG	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Aluminum	35700	3.63E+01	2960	2600	4340	2630	4140
Antimony		0.00E+00					
Arsenic		0.00E+00					
Barium	476	4.84E-01	134		144		
Beryllium	345	3.51E-01					
Boron		0.00E+00					
Cadmium	4730	4.81E+00	18.8	15.1	12.1	11.5	11.7
Calcium	72700	7.39E+01	256000	223000	263000	207000	247000
Chromium	2330	2.37E+00	24.2	17.5	31.2	70.6	33.2
Copper	1660	1.69E+00	15.3		18.9		
Iron	18400	1.87E+01	3370	2970	4800	2920	4530
Lead	265	2.70E-01	10.6	9.6	14.4	13.8	11.6
Lithium		0.00E+00					
Magnesium	15000	1.53E+01	4630	4000	5070	3960	4670
Manganese	257	2.61E-01	68.4	60.5	90.2	62.2	79.6
Mercury	160	1.63E-01					
Nickel	365	3.71E-01					
Potassium	12100	1.23E+01					
Silicon	22200	2.26E+01	1820	2270	1110	1400	2670
Silver	196	1.99E-01					
Sodium	20600	2.10E+01					
Strontium	770	7.83E-01	716	619	752	582	692
Thallium		0.00E+00					7.3
Zinc	677	6.89E-01	91.4	81.8	105	77.6	101
Total of above	2.09E+05	2.12E+02					
% Solids	11.2		23.2	26	23	23.7	25.7
Chloride			927	1540	1460	1490	1910
Fluoride							
Cyanide							
Sulfate							
Nitrite			46.06	1.5	92.12	9.212	32.9
Nitrate			2835.2	3809.8	1683.4	3455.4	2658
PO4---			3.4	2.4	8.9	2.8	4.1
Sulfide			8	16	32	24	56
Phosphorus			25	25	25	28	25
Ammonia(N)			24	16.3	23.8	15.2	102
Nitrogen(TKN)			5110	1240	1210	1140	1430
TOC %			1	1.1	1.4	0.96	1.1
Total							
Grand Total							
Sludge, Liters	8.26E+03						
Specific grav.	1.10E+00						
Sludge, Kg Wet	9.08E+03						
	pCi/g (dry)	Ci	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)
Gross alpha	5.10E+03	5.19E-03	28	32	28	38	33
Gross beta	1.40E+03	1.42E-03	38	43	41	42	46
U-234			19	14	13	14	13
U-235			0.55	0.3	0.35	0.31	0.41
U-238			12	9.6	8.9	9.3	8.4
Am-241							
Pu-239			2	4.2	6.2	11	2.2
			% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha
U-234			67.86%	43.75%	46.43%	36.84%	39.39%
U-235			1.96%	0.94%	1.25%	0.82%	1.24%
U-238			42.86%	30.00%	31.79%	24.47%	25.45%
Am-241			0.00%	0.00%	0.00%	0.00%	0.00%
Pu-239			7.14%	13.13%	22.14%	28.95%	6.67%
Total			119.82%	87.81%	101.61%	91.08%	72.76%

Enclosure 1  
SRK-271-93  
Page 17 of 41

		By <u>W. S. S. S. S. S.</u>	Date <u>12/15/93</u>	Chk. By <u>W. S. S. S. S.</u>	Date <u>12-15-93</u>			
		Weston Solar Pond Sludge Data						
	Average							Average
Analyte	207BN	207BN	207BC-SE-SL	207BC-NE-SL	207BC-SW-SL	207BC-NW-SL	207BC-CP-SL	207BC
	mg/kg	KG	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg
Aluminum	3.64E+03	3.59E+02	1680	1350	3070	2080	2350	2.20E+03
Antimony		0.00E+00						
Arsenic		0.00E+00						
Barium	1.39E+02	1.37E+01						
Beryllium		0.00E+00	10.9	9.5	12.3	9.8	9.4	1.00E+01
Boron		0.00E+00						
Cadmium	1.30E+01	1.29E+00	110	59.3	93.5	71.6	108	9.58E+01
Calcium	2.42E+05	2.39E+04	148000	92000	153000	74300	108000	1.12E+05
Chromium	3.45E+01	3.41E+00	82.3	50.6	390	56.8	127	1.36E+02
Copper	1.71E+01	1.69E+00	83.7	64.6	103	71.2	96.3	8.85E+01
Iron	4.02E+03	3.97E+02	2140	1680	3470	2370	2650	2.53E+03
Lead	1.19E+01	1.17E+00	12.4	10.2	14.4	12.3	12.9	1.26E+01
Lithium		0.00E+00						
Magnesium	4.54E+03	4.48E+02	11300	12200	13600	10300	13700	1.28E+04
Manganese	7.50E+01	7.39E+00	80.7	104	163	124	208	1.63E+02
Mercury		0.00E+00	3.5	1.4	5.3	3.6	1.5	2.48E+00
Nickel		0.00E+00						
Potassium		0.00E+00	9420	9890				9.66E+03
Silicon	2.16E+03	2.13E+02	2940	3090	3000	2550	2690	2.79E+03
Silver		0.00E+00						
Sodium		0.00E+00	32600	33000	35500	28800	31300	3.19E+04
Strontium	6.80E+02	6.70E+01	880	739	946	575	848	8.17E+02
Thallium	7.30E+00	7.20E-01						
Zinc	9.50E+01	9.37E+00	110	144	277	197	186	1.84E+02
Total of above	2.58E+05	2.54E+04						1.76E+05
% Solids	2.48E+01		8.5	8.3	7.9	8.3	10	9.13E+00
Chloride	1.63E+03	1.61E+02	9900	16600	11400	18200	11200	1.26E+04
Fluoride		0.00E+00						
Cyanide		0.00E+00	11.8	12	12.7	15.1	10	1.15E+01
Sulfate		0.00E+00	7120	10700	6460	13800	6950	8.24E+03
Nitrite	3.51E+01	3.46E+00	888.3	1743.7	1019.9	1710.8	1546.3	1.44E+03
Nitrate	2.80E+03	2.76E+02	41642	57590	37212	57590	57590	5.30E+04
PO4---	4.24E+00	4.18E-01	21	19	20	17	14	1.66E+01
Sulfide	3.80E+01	3.75E+00						
Phosphorus	2.54E+01	2.50E+00	1400	1800	2800	2400	2100	2.10E+03
Ammonia(N)	6.09E+01	6.01E+00	182	154	199	181	135	1.57E+02
Nitrogen(TKN)	1.80E+03	1.78E+02	22700	18200	21300	17600	16700	1.83E+04
TOC %	1.11E+00		3	2.1	1.6	1.7	2.2	2.15E+00
Total	6.40E+03	6.31E+02						9.60E+04
Grand Total	2.64E+05	2.60E+04						2.72E+05
Sludge, Liters	3.31E+05							3.45E+05
Specific grav.	1.20E+00							1.00E+00
Sludge, Kg Wet	3.97E+05							3.45E+05
	pCi/g (dry)	Ci	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)
Gross alpha	3.23E+01	3.18E-03	120	120	130	120	120	1.21E+02
Gross beta	4.35E+01	4.29E-03	340	320	370	270	380	3.53E+02
U-234	1.40E+01	1.38E-03	86	85	69	71	70	7.39E+01
U-235	3.94E-01	3.88E-05	2.4	3	2	2.1	2.5	2.44E+00
U-238	9.18E+00	9.05E-04	88	94	76	78	75	7.95E+01
Am-241		0.00E+00			1.2	5.1		3.15E+00
Pu-239	4.03E+00	3.97E-04	7.2	3.4	0.18	2.3	5.1	4.19E+00
	% Gross Alpha		% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha
U-234	43.41%		71.67%	70.83%	53.08%	59.17%	58.33%	60.93%
U-235	1.22%		2.00%	2.50%	1.54%	1.75%	2.08%	2.01%
U-238	28.45%		73.33%	78.33%	58.46%	65.00%	62.50%	65.57%
Am-241	0.00%		0.00%	0.00%	0.92%	4.25%	0.00%	2.60%
Pu-239	12.48%		6.00%	2.83%	0.14%	1.92%	4.25%	3.45%
Total	85.56%		153.00%	154.50%	114.14%	132.08%	127.17%	134.55%



By <u>AS/alk</u> Date <u>12/15/93</u> Chk. By <u>Rafel</u> Date <u>12-15-93</u>								
		Weston Solar Pond Sludge Data						
							Average	
Analyte	207BC	207BS-SE-SL	207BS-NE-SL	207BS-SW-SL	207BS-NW-SL	207BS-CP-SL	207BS	207BS
	KG	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	KG
Aluminum	6.92E+01	1510	1680	2390	2260	1870	1.92E+03	4.96E+01
Antimony	0.00E+00							0.00E+00
Arsenic	0.00E+00							0.00E+00
Barium	0.00E+00							0.00E+00
Beryllium	3.15E-01							0.00E+00
Boron	0.00E+00	146	124	59.4	154	138	1.29E+02	3.36E+00
Cadmium	3.02E+00	18.9	27.5	18.8	23.9	28.2	2.52E+01	6.54E-01
Calcium	3.54E+03	157000	131000	95600	76000	124000	1.19E+05	3.10E+03
Chromium	4.28E+00	30.7	35.8	27.7	23.3	30	2.97E+01	7.70E-01
Copper	2.78E+00	76.7	96	137	210	95.2	1.13E+02	2.92E+00
Iron	7.97E+01	2160	2420	3690	3490	2530	2.74E+03	7.09E+01
Lead	3.97E-01		11.3	21.1		9.4	1.28E+01	3.32E-01
Lithium	0.00E+00							0.00E+00
Magnesium	4.02E+02	9760	11300	11900	10600	9680	1.03E+04	2.67E+02
Manganese	5.13E+00	75.2	107	186	204	107	1.25E+02	3.24E+00
Mercury	7.79E-02							0.00E+00
Nickel	0.00E+00							0.00E+00
Potassium	3.04E+02	6600	7700	7970	9580	7370	7.67E+03	1.99E+02
Silicon	8.79E+01	3750	4190	5070	4790	4320	4.39E+03	1.14E+02
Silver	0.00E+00	12.8	12.4	5.9	25.9	10.4	1.23E+01	3.19E-01
Sodium	1.00E+03	23800	26500	28800	32800	24200	2.61E+04	6.76E+02
Strontium	2.57E+01	734	762	650	575	720	7.00E+02	1.81E+01
Thallium	0.00E+00							0.00E+00
Zinc	5.79E+00	80.6	133	234	300	126	1.56E+02	4.06E+00
Total of above	5.53E+03						1.74E+05	4.51E+03
% Solids		13.7	12.2	13.6	10.2	13.5	1.30E+01	
Chloride	3.97E+02	8600	17200	11600	13300	11300	1.20E+04	3.11E+02
Fluoride	0.00E+00							0.00E+00
Cyanide	3.60E-01	58.8	74.1	8.7	15.4	7.4	3.93E+01	1.02E+00
Sulfate	2.59E+02	6380	12800	6190	8070	8530	8.45E+03	2.19E+02
Nitrite	4.54E+01	5593	3948	3948	2829.4	2829.4	3.45E+03	8.95E+01
Nitrate	1.67E+03	42528	53160	84170	66450	48730	5.52E+04	1.43E+03
PO4---	5.23E-01	42	24	7.5	3.8	23	2.12E+01	5.49E-01
Sulfide	0.00E+00							0.00E+00
Phosphorus	6.61E+01	220	68	5700	5300	260	1.54E+03	3.99E+01
Ammonia(N)	4.94E+00	585	271	352	393	256	3.28E+02	8.51E+00
Nitrogen(TKN)	5.77E+02	12200	13700	16400	15000	12100	1.32E+04	3.42E+02
TOC %		2.3	2.1	2.3	1.5	2.1	2.08E+00	
Total	3.02E+03						9.42E+04	2.44E+03
Grand Total	8.55E+03						2.68E+05	6.95E+03
Sludge, Liters							1.82E+05	
Specific grav.							1.10E+00	
Sludge, Kg Wet							2.00E+05	
	Ci	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	Ci
Gross alpha	3.82E-03	220	220	150	200	150	1.74E+02	4.50E-03
Gross beta	1.11E-02	730	620	380	520	530	5.46E+02	1.42E-02
U-234	2.33E-03	160	76	71	0.04	130	1.03E+02	2.68E-03
U-235	7.67E-05	5.1	2.5	2.5	1.6	2.9	2.91E+00	7.55E-05
U-238	2.50E-03	190	84	80	0.04	150	1.19E+02	3.09E-03
Am-241	9.92E-05	0.75	2.4		1.2	2.4	1.93E+00	4.99E-05
Pu-239	1.32E-04	6.9	23	5.7	7.4	1.9	6.33E+00	1.64E-04
		% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	
U-234		72.73%	34.55%	47.33%	0.02%	86.67%	59.50%	
U-235		2.32%	1.14%	1.67%	0.80%	1.93%	1.68%	
U-238		86.36%	38.18%	53.33%	0.02%	100.00%	68.64%	
Am-241		0.34%	1.09%	0.00%	0.60%	1.60%	1.11%	
Pu-239		3.14%	10.45%	3.80%	3.70%	1.27%	3.64%	
Total		164.89%	85.41%	106.13%	5.14%	191.47%	134.56%	

	By <u>AC Stahl</u>	Date <u>12/15/93</u>	Chk. By <u>AC Stahl</u>	Date <u>12-15-93</u>			
			Weston Solar Pond Sludge Data				
						Average	
Analyte	207C-NW-SL	207C-NE-SL	207C-SW-SL	207C-SE-SL	207C-CP-SL	207C	207C
	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	mg/kg	KG
Aluminum	69.5	132	1330	82.4	97.2	2.50E+02	0.00E+00
Antimony	10.1	12.1	13.8	12.1	13	1.25E+01	0.00E+00
Arsenic	2.2	2	2.7	2	2	2.11E+00	0.00E+00
Barium							0.00E+00
Beryllium	0.85	1.1	17.6	1	1.1	3.12E+00	0.00E+00
Boron	78.9	119	1390	103	117	2.70E+02	0.00E+00
Cadmium	3.2	5.8	116	4.5	5.6	1.90E+01	0.00E+00
Calcium	845	1010	1550	1010	1080	1.09E+03	0.00E+00
Chromium	16	21.6	365	19.2	17.6	6.15E+01	0.00E+00
Copper	4.3	5.8	78	5.1	6.3	1.48E+01	0.00E+00
Iron	24.2	55.4	211	34.9	36	5.87E+01	0.00E+00
Lead	0.66	0.51	2	0.61	0.59	7.68E-01	0.00E+00
Lithium	24	36.9	108	32.7	42.8	4.66E+01	0.00E+00
Magnesium							0.00E+00
Manganese	2.5	3	8.7	3	3.3	3.80E+00	0.00E+00
Mercury	0.17	0.17	0.27	0.11	0.11	1.45E-01	0.00E+00
Nickel	6.8	8.1	23.1	8.1	8.7	1.01E+01	0.00E+00
Potassium	224000	365000	16900	327000	273000	2.53E+05	0.00E+00
Silicon	506	862	6990	607	422	1.33E+03	0.00E+00
Silver	1.7	2	4.4	2	2.2	2.36E+00	0.00E+00
Sodium	36900	49200	378000	45800	50900	8.92E+04	0.00E+00
Strontium							0.00E+00
Thallium							0.00E+00
Zinc	5.5	7.3	18.9	4	5.5	7.21E+00	0.00E+00
Total of above						3.45E+05	0.00E+00
% Solids	91	90.1	77.9	89.9	92.3		
Chloride	2860	2420	6890	2830	5360	4.56E+03	0.00E+00
Fluoride	6320	11700	29800	14800	22800	1.92E+04	0.00E+00
Cyanide	2.2	1.6	5.2	9.9	3.2	3.96E+00	0.00E+00
Sulfate	28800	53900	141000	68300	110000	9.15E+04	0.00E+00
Nitrite	1579.2	3290	1710.8	1776.6	2632	2.36E+03	0.00E+00
Nitrate	443000	287950	575900	443000	429710	4.34E+05	0.00E+00
PO4---							
Sulfide							
Phosphorus	1600	1300	3400	1400	1700	1.81E+03	0.00E+00
Ammonia(N)	2.7	2.7	4.5	2.8	3.4	3.29E+00	0.00E+00
Nitrogen(TKN)							0.00E+00
TOC %							
Total						5.53E+05	0.00E+00
Grand Total						8.99E+05	0.00E+00
Sludge, Liters							
Specific grav.							
Sludge, Kg Wet							
	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	Ci
Gross alpha	29	180	1200	25	18	1.88E+02	0.00E+00
Gross beta	500	390		420	420	4.28E+02	0.00E+00
U-234	11	0.06	9.2	0.011	5.2	5.13E+00	0.00E+00
U-235	0.36	0.098	0.4	0.016	0.84	5.29E-01	0.00E+00
U-238	16	5.3	14	1.3	31	2.01E+01	0.00E+00
Am-241	0.78	0.56	0.011	0.6	1.7	1.09E+00	0.00E+00
Pu-239	16			2.8	15	1.22E+01	0.00E+00
	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	% Gross Alpha	
U-234	37.93%	0.03%	0.77%	0.04%	28.89%	2.73%	
U-235	1.24%	0.05%	0.03%	0.06%	4.67%	0.28%	
U-238	55.17%	2.94%	1.17%	5.20%	172.22%	10.66%	
Am-241	2.69%	0.31%	0.00%	2.40%	9.44%	0.58%	
Pu-239	55.17%	0.00%	0.00%	11.20%	83.33%	6.48%	
Total	152.21%	3.34%	1.97%	18.91%	298.56%	20.73%	

Enclosure 1  
SRK-271-93  
Page 20 of 41

By <u>AC Stehla</u> Date <u>12/15/93</u> Chk. By <u>Boyd</u> Date <u>12-15-93</u>					
Weston Solar Pond Sludge Data					
	Total	Total	Ponds A/B	Ponds A/B	
Analyte	In Ponds	In Ponds	Composite	Composite	TLV-TWA
	KG	Pounds	KG	mg/kg	mg/m3
Aluminum	4.45E+02	9.80E+02	2.91E+03	3.06E+03	2 as Al soluble salts
Antimony	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.5 as Sb counpounds
Arsenic	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.2 as As
Barium	1.42E+01	3.13E+01	5.95E+01	6.26E+01	0.5 as Ba
Beryllium	3.51E-01	7.74E-01	6.59E+00	6.93E+00	0.002 as Be
Boron	3.36E+00	7.40E+00	2.59E+01	2.72E+01	1 as borate
Cadmium	6.75E+00	1.49E+01	8.62E+01	9.07E+01	
Calcium	2.70E+04	5.96E+04	1.59E+05	1.68E+05	10 as carbonate or silicate
Chromium	6.55E+00	1.44E+01	8.77E+01	9.22E+01	0.05 as Cr (VI)
Copper	6.29E+00	1.39E+01	7.49E+01	7.87E+01	1 as Cu dust & mist
Iron	4.86E+02	1.07E+03	3.18E+03	3.35E+03	1 as Fe soluble salts
Lead	1.77E+00	3.90E+00	1.40E+01	1.47E+01	0.15 as Pb inorg dust & fumes
Lithium	0.00E+00	0.00E+00	0.00E+00	0.00E+00	10 only limit listed for LiH4
Magnesium	7.30E+02	1.61E+03	8.40E+03	8.84E+03	10 MgO fume
Manganese	1.09E+01	2.40E+01	1.13E+02	1.19E+02	5 as Mn dust & compounds
Mercury	1.63E-01	3.59E-01	2.31E+00	2.43E+00	0.01 as Hg skin & alkyl compounds
Nickel	3.71E-01	8.18E-01	3.31E+00	3.48E+00	1 as Ni insoluble compounds
Potassium	2.11E+02	4.65E+02	4.97E+03	5.23E+03	2 as KOH
Silicon	3.49E+02	7.70E+02	2.90E+03	3.05E+03	10 precipitated silica
Silver	5.19E-01	1.14E+00	4.24E+00	4.46E+00	0.01 as Ag
Sodium	6.97E+02	1.54E+03	1.64E+04	1.72E+04	2 as NaOH
Strontium	8.60E+01	1.90E+02	6.99E+02	7.34E+02	10 not listed
Thallium	7.20E-01	1.59E+00	2.90E+00	3.05E+00	
Zinc	1.41E+01	3.11E+01	1.39E+02	1.46E+02	10 ZnO dust
Total of above	3.01E+04	6.64E+04	2.00E+05	2.10E+05	
% Solids					
Chloride	4.72E+02	1.04E+03	7.40E+03	7.78E+03	
Fluoride	0.00E+00	0.00E+00	0.00E+00	0.00E+00	2.5 as F, fluorides
Cyanide	1.02E+00	2.24E+00	1.18E+01	1.24E+01	5 as CN
Sulfate	2.19E+02	4.83E+02	4.53E+03	4.76E+03	
Nitrite	9.30E+01	2.05E+02	1.20E+03	1.26E+03	
Nitrate	1.71E+03	3.76E+03	3.04E+04	3.20E+04	
PO4---	9.67E-01	2.13E+00	1.17E+01	1.22E+01	
Sulfide	3.75E+00	8.26E+00	1.51E+01	1.59E+01	
Phosphorus	4.24E+01	9.36E+01	1.04E+03	1.10E+03	
Ammonia(N)	1.45E+01	3.20E+01	1.44E+02	1.51E+02	17 as NH3
Nitrogen(TKN)	5.20E+02	1.15E+03	9.68E+03	1.02E+04	
TOC %					
Total	3.07E+03	6.77E+03	5.45E+04	5.73E+04	
Grand Total	3.32E+04	7.32E+04	2.54E+05	2.67E+05	
Sludge, Liters			8.66E+05		
Specific grav.			1.10E+00		
Sludge, Kg Wet			9.51E+05		
	Ci		Ci	pCi/g (dry)	
Gross alpha	1.29E-02		1.36E-01	1.43E+02	
Gross beta	1.99E-02		2.61E-01	2.74E+02	
U-234	4.06E-03		5.17E-02	5.44E+01	
U-235	1.14E-04		1.58E-03	1.66E+00	
U-238	4.00E-03		5.49E-02	5.77E+01	
Am-241	4.99E-05		1.47E-03	1.55E+00	
Pu-239	5.61E-04		4.31E-03	4.53E+00	
			% Gross Alph	% Gross Alpha	
U-234			38.12%	38.12%	
U-235			1.16%	1.16%	
U-238			40.47%	40.47%	
Am-241			1.08%	1.08%	
Pu-239			3.17%	3.17%	
Total			84.01%	84.01%	

Enclosure 1  
SRK-271-93  
Page 21 of 41

Hazard Calculation for Early Remediation of Solar Ponds By W. S. St. John Date 12/15/93 HK. By W. S. St. John Date 12/15/93 Calc. No. 93-SAE-004 Sheet 10 of 28 Sheets

Analyte	Less than multiplier = 1.0				Halliburton NUS Data Sampled August 1991			
	PS207A-NE mg/kg	PS207A KG	PS207BN-NE mg/kg	PS207BN-NW mg/kg	PS207BN-SE mg/kg	PS207BN-SW mg/kg	Average PS207BN mg/kg	Average PS207BN KG
1,1,1-Trichloroethane	0.024	2.18E-04						
2-Butanone								
Benzene								
Trichlorotrifluoroethane	0.26	2.36E-03						
Tetrachloroethylene	0.29	2.63E-03						
Trichloroethylene	0.029	2.63E-04						
Pyrene								
Arsenic	40.2	4.6E-02	16.7	17.2	14.2	16.5	16.	1.6E+00
Barium	210	2.4E-01	89.1	111	105	116	1.05E+02	1.04E+01
Boron	84.3	9.7E-02	18	14.2	13.5	12.8	1.46E+01	1.45E+00
Cadmium	1300	1.5E+00	6.7	6.9	8.5	12.8	8.73E+00	8.63E-01
Calcium								
Chromium	658	7.59E-01	7.9	31.9	33.3	19.8	2.32E+01	2.30E+00
Lead	89	1.03E-01	13.8	14.2	21.3	14	1.58E+01	1.57E+00
Magnesium	11400	1.32E+01	3270	3940	3850	4160	3.81E+03	3.76E+02
Mercury	0.8	9.2E-04	0.8	0.7	0.3	0.4	5.50E-01	5.44E-02
Nickel	102	1.18E-01	8.4	9.5	7.1	8.2	8.30E+00	8.21E-01
Potassium	7340	8.5E+00	1260	1350	1550	1350	1.4E+03	1.4E+02
Selenium	47.2	5.4E-02	25.1	25.9	21.3	24.7	24.	2.4E+00
Silver	45.7	5.3E-02	2.5	2.6	2.1	2.5	2.	2.4E-01
Sodium	14500	1.67E+01	1830	1990	1640	1850	1.8E+03	1.8E+02
Ammonia	36	4.15E-02	20	23	35	9.8	2.20E+01	2.17E+00
CN-	1.6	1.85E-03	0.25	0.25	0.25	0.25	2.5E-01	2.5E-02
Cl-	400	4.62E-01	260	80	160	480	2.45E+02	2.42E+01
NO3-	700	8.08E-01	174	34	196	140	1.36E+02	1.35E+01
SO4 =	400	4.62E-01	3200	3200	3000	3000	3.10E+03	3.07E+02
Total Organic Carbon	14000	1.62E+01	3300	3200	3400	3000	3.23E+03	3.19E+02
Total		5.93E+01						1.38E+03
Moisture - Gravimetric %	87.3	7.93E+03	76.1	76.8	71.8	75.7	75.1	2.98E+05
Moisture - Karl Fisher %	34		23.5	25.3	25.7	27.9	25.6	42
Specific Gravity	1.1		1.2	1.2	1.2	1.2	1.2	1
Gross Alpha - pCi/g	570	6.58E-04	9.4	5.2	11	10	8.90E+00	8.80E-04
Gross Beta - pCi/g	95	1.10E-04	5.4	5.1	8.8	9.8	7.28E+00	7.20E-04
Sludge Liters	8.26E+03						3.31E+05	
Sludge Dry Weight, KG	1.15E+03						9.89E+04	
Sludge Weight KG	9.09E+03	7.99E+03					3.97E+05	3.00E+05
Sludge Volume gallons	2.18E+03						8.75E+04	
# of 10000 gallon tanks	0.22						9	

Analyte	Less than multiplier = 1.0				Average	PS207BC	PS207BC-NE	PS207BS-NW	PS207BS-NWD
	PS207BC-NW	PS207BC-SE	PS207BC-SW	PS207BC					
	mg/kg	mg/kg	mg/kg	mg/kg	KG	mg/kg	mg/kg	mg/kg	mg/kg
1,1,1-Trichloroethane									
2-Butanone									
Benzene									
Trichlorotrifluoroethane									
Tetrachloroethylene						0.46	0.21		0.26
Trichloroethylene									
Pyrene									
Arsenic	60.6	44.4	43.5	47.	1.4E+00	34.2	50.6	59.7	
Barium	120	86.7	76.1	8.23E+01	2.48E+00	80.3	124	134	
Boron	138	131	97.8	1.29E+02	3.90E+00	336	106	112	
Cadmium	53	84.4	47.8	5.79E+01	1.74E+00	26.5	30.4	28.6	
Calcium									
Chromium	48.5	68.9	130	6.43E+01	1.94E+00	41.9	51.9	45.5	
Lead	45.5	33.3	32.6	35.	1.1E+00	25.6	38	61	
Magnesium	19800	11900	10700	1.24E+04	3.73E+02	10200	13800	15200	
Mercury	5.5	1.1	1.1	2.15E+00	6.47E-02	0.9	1	5	
Nickel	30.3	22.2	21.7	24.	7.1E-01	17.1	25.3	26	
Potassium	15400	11700	10900	1.20E+04	3.60E+02	8910	12100	12900	
Selenium	90.9	66.7	65.2	7.1E+01	2.1E+00	51.3	75.9	77.9	
Silver	27.3	6.7	10.9	1.3E+01	3.8E-01	5.1	26.6	40.3	
Sodium	54200	40200	38100	4.19E+04	1.26E+03	30000	42100	44600	
Ammonia	46	42	58	4.28E+01	1.29E+00	10	17	22	
CN-	0.52	1.3	0.38	6.35E-01	1.91E-02	0.72	4.1	0.89	
Cl-	6000	4000	4200	4.65E+03	1.40E+02	4000	4000	4000	
NO3-	1000	1480	1400	1.32E+03	3.97E+01	1780	1540	1780	
SO4 =	1800	680	660	9.70E+02	2.92E+01	600	800	720	
Total Organic Carbon	5500	8300	6800	7.35E+03	2.21E+02	9200	11000	6800	
Total					2.44E+03				
Moisture - Gravimetric %	93.4	91	90.8	91.275	3.15E+05	88.3	92.1	92.3	
Moisture - Karl Fisher %	53	47	51	48.25		43	50		
Specific Gravity	1	1	1	1		1.1	1		
Gross Alpha - pCi/g	pCi/g	pCi/g	pCi/g	pCi/g	Curies	pCi/g	pCi/g	pCi/g	
Gross Alpha - pCi/g	13	19	16	1.68E+01	5.04E-04	61	32	31	
Gross Beta - pCi/g	14	16	12	1.45E+01	4.36E-04	47	24	22	
Sludge Liters									
Sludge Dry Weight, KG				3.45E+05					
Sludge Weight KG				3.01E+04					
Sludge Volume Gallons				3.45E+05	3.17E+05				
# of 10000 gallon tanks				9.11E+04					
				10					

Analyte	Less than multiplier = 1.0			Combined			Combined			Combined		
	PS207BS-SE mg/kg	PS207BS-SW mg/kg	Average PS207BS mg/kg	Average PS207BS KG	B Ponds KG	A/B Ponds KG	Combined A/B Ponds mg/kg	Combined A/B Ponds Pounds	Combined A/B Ponds Pounds	Combined A/B Ponds mg/kg	Combined A/B Ponds Pounds	Combined A/B Ponds Pounds
1,1,1-Trichloroethane					0.00E+00	2.18E-04	2.30E-04	4.80E-04				
2-Butanone					0.00E+00							
Benzene					0.00E+00							
Trichlorotrifluoroethane					0.00E+00	2.36E-03	2.49E-03	5.20E-03				
Tetrachloroethylene	0.23	0.032	0.24	4.68E-02	4.68E-02	4.94E-02	5.22E-02	1.09E-01				
Trichloroethylene					0.00E+00	2.63E-04	2.78E-04	5.80E-04				
Pyrene					0.00E+00							
Arsenic	37	36	4.06E+01	8.22E-01	3.83E+00	3.88E+00	4.10E+00	8.55E+00				
Barium	133	62.2	1.01E+02	2.05E+00	1.49E+01	1.52E+01	1.60E+01	3.34E+01				
Boron	77.8	349	2.18E+02	4.41E+00	9.76E+00	9.85E+00	1.04E+01	2.17E+01				
Cadmium	7.4	20.7	2.10E+01	4.26E-01	3.03E+00	4.53E+00	4.79E+00	9.98E+00				
Calcium						0.00E+00	0.00E+00	0.00E+00				
Chromium	25.9	25.2	3.54E+01	7.17E-01	4.95E+00	5.71E+00	6.03E+00	1.26E+01				
Lead	27.8	27	3.25E+01	6.58E-01	3.28E+00	3.39E+00	3.58E+00	7.46E+00				
Magnesium	5140	8170	9.50E+03	1.92E+02	9.42E+02	9.55E+02	1.01E+03	2.10E+03				
Mercury	1	0.9	1.5	2.9E-02	1.48E-01	1.49E-01	1.58E-01	3.29E-01				
Nickel	18.5	18	20.	4.0E-01	1.93E+00	2.05E+00	2.16E+00	4.51E+00				
Potassium	5580	8800	8.95E+03	1.81E+02	6.77E+02	6.86E+02	7.24E+02	1.51E+03				
Selenium	55.6	54.1	59.	1.2E+00	5.73E+00	5.78E+00	6.10E+00	1.27E+01				
Silver	5.6	5.4	12.	2.5E-01	8.73E-01	9.26E-01	9.78E-01	2.04E+00				
Sodium	4080	31200	2.72E+04	5.50E+02	1.99E+03	2.01E+03	2.12E+03	4.43E+03				
Ammonia	34	21	2.11E+01	4.28E-01	3.89E+00	3.93E+00	4.15E+00	8.65E+00				
CN-	0.55	0.46	1.06E+00	2.14E-02	6.52E-02	6.71E-02	7.08E-02	1.48E-01				
Cl-	4000	4000	4000	8.1E+01	2.45E+02	2.46E+02	2.59E+02	5.41E+02				
NO3-	1720	1600	1.69E+03	3.42E+01	8.74E+01	8.82E+01	9.32E+01	1.94E+02				
SO4 =	620	460	6.10E+02	1.24E+01	3.48E+02	3.49E+02	3.68E+02	7.68E+02				
Total Organic Carbon	8400	7800	8.58E+03	1.74E+02	7.14E+02	7.30E+02	7.71E+02	1.61E+03				
Total				1.24E+03	5.06E+03	5.12E+03	5.40E+03	1.13E+04				
Moisture - Gravimetric %	89.2	88.9	89.65	1.75E+05	8.41E-01	7.97E+05	8.41E+01	1.75E+06				
Moisture - Karl Fisher %	39	49	39									
Specific Gravity	1.1	1.1	1.075		1.09E+00	1.09E+00						
Gross Alpha - pCi/g	37	31	4.01E+01	8.13E-04	2.20E-03	2.85E-03						
Gross Beta - pCi/g	22	21	2.83E+01	5.72E-04	1.73E-03	1.84E-03						
Sludge Liters												
Sludge Dry Weight, KG			1.82E+05		8.58E+05	8.66E+05	Gallons =	2.29E+05				
Sludge Weight KG			2.02E+04		1.49E+05	1.50E+05						
Sludge Volume gallons			1.96E+05	1.77E+05	9.38E+05	9.47E+05		2.09E+06				
# of 10000 gallon tanks			4.81E+04		2.27E+05	2.29E+05		23				

Excel File NUSPSLG.XLS

Analyte	CS-001 mg/kg	CS-001D mg/kg	CS-002 mg/kg	CS-003 mg/kg	Average Clairifyer Sludge mg/kg	Average Clairifyer Sludge KG
1,1,1-Trichloroethane	0.026	0.009	0.018	0.029	2.15E-02	1.30E-03
2-Butanone	0.18	0.092	0.087	0.13	1.18E-01	7.10E-03
Benzene						
Trichlorotrifluoroethane	0.1	0.073	0.045	0.15	9.38E-02	5.66E-03
Tetrachloroethylene	1	0.28	0.32	0.83	5.97E-01	3.60E-02
Trichloroethylene		0.007				
Pyrene						
Arsenic	21.9	13.5	14.5	12.5	1.49E+01	3.25E-01
Barium	217	94.8	215	207	1.93E+02	4.20E+00
Boron	687	420	1230	1380	1.05E+03	2.30E+01
Cadmium	4660	2010	3690	4280	3.77E+03	8.22E+01
Calcium						
Chromium	2640	1180	3190	2900	2.67E+03	5.82E+01
Lead	182	83	191	187	1.70E+02	3.71E+00
Magnesium	24200	10400	23300	24100	2.16E+04	4.71E+02
Mercury	5	5.3	12	14	1.04E+01	2.27E-01
Nickel	738	339	902	822	7.54E+02	1.65E+01
Potassium	62300	28700	67900	67100	6.02E+04	1.31E+03
Selenium	194	89.7	218	187	1.8E+02	3.98E+00
Silver	156	64.6	153	166	1.43E+02	3.12E+00
Sodium	84000	39200	95900	96300	8.46E+04	1.85E+03
Ammonia	84	64	28	71	5.77E+01	1.26E+00
CN-	25	21	190	110	1.08E+02	2.35E+00
Cl-	3200	3200	3600	3400	3.40E+03	7.42E+01
NO3-	8200	9000	8800	8400	8.60E+03	1.88E+02
SO4 =	4200	4400	5200	5600	5.03E+03	1.10E+02
Total Organic Carbon	3500	6200	4600	6400	5.28E+03	1.15E+02
Total	1.99E+05	1.05E+05	2.19E+05	2.22E+05	1.98E+05	4.32E+03
Moisture - Gravimetric %						
Moisture - Karl Fisher %	69	33.1	72.5	67.9	6.38E+01	3.85E+04
Specific Gravity					1.34E+00	
Gross Alpha - pCi/g	pCi/g	pCi/g	pCi/g	pCi/g	pCi/g	Curies
Gross Beta - pCi/g	6600	6300	3400	4700	4.85E+03	1.06E-01
	780	860	540	600	6.53E+02	1.43E-02
Sludge Liters						
Sludge Dry Weight, KG					4.50E+04	
Sludge Weight KG					2.18E+04	
Sludge Volume gallons					6.03E+04	4.28E+04
# of 10000 gallon tanks					1.19E+04	
					2	



	By <u>De Stalder</u>	Date <u>12/15/93</u>	Chk. By <u>Refel</u>	Date <u>12-15-93</u>		
			Less then Multiplier =	1.0		
					Conservative	Conservative
		Weston	NUS	Best Estimate	Estimate	Estimate
Analyte	Molecular	207A-CP-SL	PS207A	207A Sludge	207A Sludge	207A Sludge
	Weight	mg/kg	mg/kg	mg/kg	mg/kg	KG
1,1,1-Trichloroethane			0.024	2.40E-02	2.40E-02	2.77E-05
Trichlorotrifluoroethane	197.5		0.26	2.60E-01	2.60E-01	3.00E-04
Tetrachloroethylene	165.8		0.29	2.90E-01	2.90E-01	3.34E-04
Trichloroethylene	131.4		0.029	2.90E-02	2.90E-02	3.34E-05
Aluminum	26.98	35700		3.57E+04	3.57E+04	4.12E+01
Arsenic	74.92		40.2	4.02E+01	4.02E+01	4.64E-02
Barium	137.33	476	210	3.43E+02	4.76E+02	5.49E-01
Beryllium	9.012	345		3.45E+02	3.45E+02	3.98E-01
Boron	10.81		84.3	8.43E+01	8.43E+01	9.72E-02
Cadmium	112.41	4730	1300	3.02E+03	4.73E+03	5.45E+00
Calcium	40.08	72700		7.27E+04	7.27E+04	8.38E+01
Chromium	51.996	2330	658	1.49E+03	2.33E+03	2.69E+00
Copper	63.546	1660		1.66E+03	1.66E+03	1.91E+00
Iron	55.847	18400		1.84E+04	1.84E+04	2.12E+01
Lead	106.4	265	89	1.77E+02	2.65E+02	3.06E-01
Magnesium	24.305	15000	11400	1.32E+04	1.50E+04	1.73E+01
Manganese	54.938	257		2.57E+02	2.57E+02	2.96E-01
Mercury	200.59	160	0.8	8.04E+01	1.60E+02	1.85E-01
Nickel	58.7	365	102	2.34E+02	3.65E+02	4.21E-01
Potassium	39.098	12100	7340	9.72E+03	1.21E+04	1.40E+01
Silicon	28.06	22200		2.22E+04	2.22E+04	2.56E+01
Silver	107.87	196	45.7	1.21E+02	1.96E+02	2.26E-01
Sodium	22.99	20600	14500	1.76E+04	2.06E+04	2.38E+01
Strontium	87.62	770		7.70E+02	7.70E+02	8.88E-01
Thallium	204.37			0.00E+00	0.00E+00	0.00E+00
Zinc	65.38	677		6.77E+02	6.77E+02	7.81E-01
Chloride	35.453		400	4.00E+02	4.00E+02	4.61E-01
Cyanide	26.0177		1.6	1.60E+00	1.60E+00	1.85E-03
Sulfate	96.06		400	4.00E+02	4.00E+02	4.61E-01
Nitrite	46			0.00E+00	0.00E+00	0.00E+00
Nitrate	62		700	7.00E+02	7.00E+02	8.07E-01
PO4---	94.97			0.00E+00	0.00E+00	0.00E+00
Sulfide	32.06			0.00E+00	0.00E+00	0.00E+00
Phosphorus	30.97			0.00E+00	0.00E+00	0.00E+00
Ammonia	17.0237		36	3.60E+01	3.60E+01	4.15E-02
Nitrogen(TKN)	14			0.00E+00	0.00E+00	0.00E+00
TOC	12		14000	1.40E+04	1.40E+04	1.61E+01
Grand Total		2.09E+05	5.13E+04	2.14E+05	2.25E+05	2.59E+02
% Solids		11.2	12.7	12.0	12.7	
Sludge, Liters		8.26E+03	8.26E+03	8.26E+03	8.26E+03	
Specific grav.		1.10E+00	1.1	1.10E+00	1.10E+00	
Sludge, Kg (Wet)		9.08E+03	9.08E+03	9.08E+03	9.08E+03	8.19E+03
Sludge, Kg (Dry)		1.02E+03	1.15E+03	1.09E+03	1.15E+03	
Moisture - Kg		8.06E+03	7.93E+03	8.00E+03	7.93E+03	
# 10,000 gal tank					0.22	
		pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	Curies
Gross alpha		5.10E+03	570	2.84E+03	5.10E+03	5.88E-03
Gross beta		1.40E+03	95	7.48E+02	1.40E+03	1.61E-03
U-234		3100		3.10E+03	3.10E+03	3.57E-03
U-235		94				

	By <u>A.C. Stalkin</u>	Date <u>12/15/93</u>	Chk. By <u>B. J. J.</u>	Date <u>12-15-93</u>		
	Weston			Conservative	Conservative	Weston
	Average	NUS	Best Estimate	Estimate	Estimate	Average
Analyte	207BN	PS207BN	207BN Sludge	207BN Sludge	207BN Sludge	207BC
	mg/kg	mg/kg	mg/kg	mg/kg	KG	mg/kg
1,1,1-Trichloroethane						
Trichlorotrifluoroethane						
Tetrachloroethylene						
Trichloroethylene						
Aluminum	3.64E+03		3.64E+03	3.64E+03	3.60E+02	2.20E+03
Arsenic			0.00E+00	0.00E+00	0.00E+00	
Barium	1.39E+02	105	1.22E+02	1.39E+02	1.37E+01	
Beryllium			0.00E+00	0.00E+00	0.00E+00	1.00E+01
Boron		14.6	1.46E+01	1.46E+01	1.44E+00	
Cadmium	1.30E+01	8.73	1.09E+01	1.30E+01	1.29E+00	9.58E+01
Calcium	2.42E+05		2.42E+05	2.42E+05	2.39E+04	1.12E+05
Chromium	3.45E+01	23.2	2.89E+01	3.45E+01	3.41E+00	1.36E+02
Copper	1.71E+01		1.71E+01	1.71E+01	1.69E+00	8.85E+01
Iron	4.02E+03		4.02E+03	4.02E+03	3.98E+02	2.53E+03
Lead	1.19E+01	15.8	1.38E+01	1.58E+01	1.56E+00	1.26E+01
Magnesium	4.54E+03	3810	4.18E+03	4.54E+03	4.49E+02	1.28E+04
Manganese	7.50E+01		7.50E+01	7.50E+01	7.41E+00	1.63E+02
Mercury		0.55	5.50E-01	5.50E-01	5.44E-02	2.48E+00
Nickel		8.3	8.30E+00	8.30E+00	8.21E-01	
Potassium		1400	1.40E+03	1.40E+03	1.38E+02	9.66E+03
Silicon	2.16E+03		2.16E+03	2.16E+03	2.14E+02	2.79E+03
Silver			0.00E+00	0.00E+00	0.00E+00	
Sodium			0.00E+00	0.00E+00	0.00E+00	3.19E+04
Strontium	6.80E+02		6.80E+02	6.80E+02	6.72E+01	8.17E+02
Thallium	7.30E+00		7.30E+00	7.30E+00	7.22E-01	
Zinc	9.50E+01		9.50E+01	9.50E+01	9.39E+00	1.84E+02
Chloride	1.63E+03	245	9.39E+02	1.63E+03	1.61E+02	1.26E+04
Cyanide			0.00E+00	0.00E+00	0.00E+00	1.15E+01
Sulfate		3100	3.10E+03	3.10E+03	3.07E+02	8.24E+03
Nitrite	3.51E+01		3.51E+01	3.51E+01	3.47E+00	1.44E+03
Nitrate	2.80E+03	136	1.47E+03	2.80E+03	2.77E+02	5.30E+04
PO4---	4.24E+00		4.24E+00	4.24E+00	4.19E-01	1.66E+01
Sulfide	3.80E+01		3.80E+01	3.80E+01	3.76E+00	
Phosphorus	2.54E+01		2.54E+01	2.54E+01	2.51E+00	2.10E+03
Ammonia	7.40E+01		7.40E+01	7.40E+01	7.31E+00	1.91E+02
Nitrogen(TKN)	1.80E+03		1.80E+03	1.80E+03	1.78E+02	1.83E+04
TOC	1.11E+04	3230	7.15E+03	1.11E+04	1.10E+03	2.15E+04
Grand Total	2.75E+05	1.21E+04	2.73E+05	2.80E+05	2.76E+04	2.93E+05
% Solids	24.8	24.9	24.9	24.9		9.1
Sludge, Liters	3.31E+05	3.31E+05	3.31E+05	3.31E+05		3.45E+05
Specific grav.	1.20E+00	1.2	1.20E+00	1.20E+00		1.00E+00
Sludge, Kg (Wet)	3.97E+05	3.97E+05	3.97E+05	3.97E+05	3.26E+05	3.45E+05
Sludge, Kg (Dry)	9.86E+04	9.89E+04	9.87E+04	9.89E+04		3.15E+04
Moisture - Kg	2.98E+05	2.98E+05	2.98E+05	2.98E+05		3.14E+05
# 10,000 gal tank				8.7		
	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	Curies	pCi/g (dry)
Gross alpha	3.23E+01	8.9	2.06E+01	3.23E+01	3.19E-03	1.21E+02
Gross beta	4.35E+01	7.28	2.54E+01	4.35E+01	4.30E-03	3.53E+02
U-234	1.40E+01		1.40E+01	1.40E+01	1.38E-03	7.39E+01
U-235	3.94E-01		3.94E-01	3.94E-01	3.89E-05	2.44E+00
U-238	9.18E+00		9.18E+00	9.18E+00	9.07E-04	7.95E+01
Am-241			0.00E+00	0.00E+00	0.00E+00	3.15E+00
Pu-239	4.03E+00		4.03E+00	4.03E+00	3.98E-04	4.19E+00
Total Specific Isotopes						
Sum of Gross						

	By <u>AS Stalla</u>	Date <u>12/11/93</u>	Chk. By <u>AS Stalla</u>	Date <u>12-11-93</u>		
	NUS	Best Estimate	Conservative Estimate	Conservative Estimate	Westen Average	NUS
Analyte	PS207BC	207BC Sludge	207BC Sludge	207BC Sludge	207BS	PS207BS
	mg/kg	mg/kg	mg/kg	KG	mg/kg	mg/kg
1,1,1-Trichloroethane						
Trichlorotrifluoroethane						
Tetrachloroethylene						0.24
Trichloroethylene						
Aluminum		2.20E+03	2.20E+03	6.92E+01	1.92E+03	
Arsenic		0.00E+00	0.00E+00	0.00E+00		40.6
Barium	82.3	8.23E+01	8.23E+01	2.59E+00		101
Beryllium		1.00E+01	1.00E+01	3.15E-01		
Boron	129	1.29E+02	1.29E+02	4.06E+00	1.29E+02	218
Cadmium	57.9	7.69E+01	9.58E+01	3.02E+00	2.52E+01	21
Calcium		1.12E+05	1.12E+05	3.54E+03	1.19E+05	
Chromium	64.3	1.00E+02	1.36E+02	4.28E+00	2.97E+01	35.4
Copper		8.85E+01	8.85E+01	2.78E+00	1.13E+02	
Iron		2.53E+03	2.53E+03	7.97E+01	2.74E+03	
Lead		1.26E+01	1.26E+01	3.97E-01	1.28E+01	32.5
Magnesium	12400	1.26E+04	1.28E+04	4.02E+02	1.03E+04	9500
Manganese		1.63E+02	1.63E+02	5.13E+00	1.25E+02	
Mercury	2.15	2.31E+00	2.48E+00	7.79E-02		
Nickel		0.00E+00	0.00E+00	0.00E+00		
Potassium	12000	1.08E+04	1.20E+04	3.78E+02	7.67E+03	8950
Silicon		2.79E+03	2.79E+03	8.79E+01	4.39E+03	
Silver		0.00E+00	0.00E+00	0.00E+00	1.23E+01	12
Sodium	41900	3.69E+04	4.19E+04	1.32E+03	2.61E+04	20400
Strontium		8.17E+02	8.17E+02	2.57E+01	7.00E+02	
Thallium		0.00E+00	0.00E+00	0.00E+00		
Zinc		1.84E+02	1.84E+02	5.79E+00	1.56E+02	
Chloride	4650	8.63E+03	1.26E+04	3.97E+02	1.20E+04	
Cyanide	0.635	6.04E+00	1.15E+01	3.60E-01	3.93E+01	1.06
Sulfate	970	4.60E+03	8.24E+03	2.59E+02	8.45E+03	610
Nitrite		1.44E+03	1.44E+03	4.54E+01	3.45E+03	
Nitrate	1320	2.72E+04	5.30E+04	1.67E+03	5.52E+04	1690
PO4---		1.66E+01	1.66E+01	5.23E-01	2.12E+01	
Sulfide		0.00E+00	0.00E+00	0.00E+00		
Phosphorus		2.10E+03	2.10E+03	6.61E+01	1.54E+03	
Ammonia	42.8	1.17E+02	1.91E+02	6.00E+00	3.98E+02	21.1
Nitrogen(TKN)		1.83E+04	1.83E+04	5.77E+02	1.32E+04	
TOC	7350	1.44E+04	2.15E+04	6.77E+02	2.08E+04	8580
Grand Total	8.10E+04	2.59E+05	3.06E+05	9.63E+03	2.89E+05	5.02E+04
% Solids	8.7	8.9	9.1		13.0	21.6
Sludge, Liters	3.45E+05	3.45E+05	3.45E+05		1.82E+05	1.82E+05
Specific grav.	1	1.00E+00	1.00E+00		1.10E+00	1.075
Sludge, Kg (Wet)	3.45E+05	3.45E+05	3.45E+05	3.23E+05	2.00E+05	1.95E+05
Sludge, Kg (Dry)	3.01E+04	3.08E+04	3.15E+04		2.59E+04	4.22E+04
Moisture - Kg	3.15E+05	3.14E+05	3.14E+05		1.74E+05	1.53E+05
# 10,000 gal tank			9.1			
	pCi/g (dry)	pCi/g (dry)	pCi/g (dry)	Curies	pCi/g (dry)	pCi/g (dry)
Gross alpha	16.8	6.90E+01	1.21E+02	3.82E-03	1.74E+02	40.1
Gross beta	14.5	1.84E+02	3.53E+02	1.11E-02	5.46E+02	28.3
U-234		7.39E+01	7.39E+01	2.33E-03	1.03E+02	
U-235		2.44E+00	2.44E+00	7.67E-05	2.91E+00	
U-238		7.95E+01	7.95E+01	2.50E-03	1.19E+02	
Am-241		3.15E+00	3.15E+00	9.92E-05	1.93E+00	
Pu-239		4.19E+00	4.19E+00	1.32E-04	6.33E+00	
Total Specific Isotopes						
Sum of Gross						

	By <u>W. J. Smith</u>	Date <u>12/15/93</u>	Chk. By <u>R. J. Smith</u>	Date <u>12/15/93</u>		
		Conservative	Conservative	Conservative	Conservative	Conservative
	Best Estimate	Estimate	Estimate	Estimate	Estimate	Estimate
Analyte	207BS Sludge	207BS Sludge	207BS Sludge	B Pond Sludge	B Pond Sludge	A/B Sludge
	mg/kg	mg/kg	KG	KG	mg/kg	KG
1,1,1-Trichloroethane				0.00E+00	0.00E+00	2.77E-05
Trichlorotrifluoroethane				0.00E+00	0.00E+00	3.00E-04
Tetrachloroethylene	2.40E-01	2.40E-01	1.02E-02	1.02E-02	5.92E-02	1.06E-02
Trichloroethylene				0.00E+00	0.00E+00	3.34E-05
Aluminum	1.92E+03	1.92E+03	8.18E+01	5.10E+02	2.95E+03	5.52E+02
Arsenic	4.06E+01	4.06E+01	1.73E+00	1.73E+00	1.00E+01	1.78E+00
Barium	1.01E+02	1.01E+02	4.31E+00	2.06E+01	1.19E+02	2.12E+01
Beryllium	0.00E+00	0.00E+00	0.00E+00	3.15E-01	1.82E+00	7.13E-01
Boron	1.74E+02	2.18E+02	9.31E+00	1.48E+01	8.56E+01	1.49E+01
Cadmium	2.31E+01	2.52E+01	1.08E+00	5.38E+00	3.11E+01	1.08E+01
Calcium	1.19E+05	1.19E+05	5.10E+03	3.26E+04	1.88E+05	3.27E+04
Chromium	3.25E+01	3.54E+01	1.51E+00	9.21E+00	5.32E+01	1.19E+01
Copper	1.13E+02	1.13E+02	4.81E+00	9.28E+00	5.36E+01	1.12E+01
Iron	2.74E+03	2.74E+03	1.17E+02	5.94E+02	3.43E+03	6.15E+02
Lead	2.27E+01	3.25E+01	1.39E+00	3.35E+00	1.93E+01	3.65E+00
Magnesium	9.89E+03	1.03E+04	4.39E+02	1.29E+03	7.46E+03	1.31E+03
Manganese	1.25E+02	1.25E+02	5.34E+00	1.79E+01	1.03E+02	1.82E+01
Mercury	0.00E+00	0.00E+00	0.00E+00	1.32E-01	7.64E-01	3.17E-01
Nickel	0.00E+00	0.00E+00	0.00E+00	8.21E-01	4.74E+00	1.24E+00
Potassium	8.31E+03	8.95E+03	3.82E+02	8.98E+02	5.19E+03	9.12E+02
Silicon	4.39E+03	4.39E+03	1.87E+02	4.89E+02	2.82E+03	5.14E+02
Silver	1.22E+01	1.23E+01	5.26E-01	5.26E-01	3.04E+00	7.52E-01
Sodium	2.32E+04	2.61E+04	1.11E+03	2.43E+03	1.41E+04	2.46E+03
Strontium	7.00E+02	7.00E+02	2.99E+01	1.23E+02	7.10E+02	1.24E+02
Thallium	0.00E+00	0.00E+00	0.00E+00	7.22E-01	4.17E+00	7.22E-01
Zinc	1.56E+02	1.56E+02	6.68E+00	2.19E+01	1.26E+02	2.26E+01
Chloride	1.20E+04	1.20E+04	5.12E+02	1.07E+03	6.18E+03	1.07E+03
Cyanide	2.02E+01	3.93E+01	1.68E+00	2.04E+00	1.18E+01	2.04E+00
Sulfate	4.53E+03	8.45E+03	3.61E+02	9.26E+02	5.35E+03	9.27E+02
Nitrite	3.45E+03	3.45E+03	1.48E+02	1.96E+02	1.14E+03	1.96E+02
Nitrate	2.84E+04	5.52E+04	2.36E+03	4.30E+03	2.49E+04	4.30E+03
PO4---	2.12E+01	2.12E+01	9.04E-01	1.85E+00	1.07E+01	1.85E+00
Sulfide	0.00E+00	0.00E+00	0.00E+00	3.76E+00	2.17E+01	3.76E+00
Phosphorus	1.54E+03	1.54E+03	6.58E+01	1.34E+02	7.77E+02	1.34E+02
Ammonia	2.10E+02	3.98E+02	1.70E+01	3.03E+01	1.75E+02	3.04E+01
Nitrogen(TKN)	1.32E+04	1.32E+04	5.64E+02	1.32E+03	7.62E+03	1.32E+03
TOC	1.47E+04	2.08E+04	8.86E+02	2.66E+03	1.54E+04	2.67E+03
Grand Total	2.49E+05	2.90E+05	1.24E+04	4.97E+04	2.87E+05	4.99E+04
% Solids	17.3	21.6		18.4		18.4
Sludge, Liters	1.82E+05	1.82E+05		8.58E+05		8.66E+05
Specific grav.	1.09E+00	1.09E+00		1.10E+00		1.10E+00
Sludge, Kg (Wet)	1.98E+05	1.98E+05	1.67E+05	9.40E+05		9.49E+05
Sludge, Kg (Dry)	3.42E+04	4.27E+04		1.73E+05		1.74E+05
Moisture - Kg	1.64E+05	1.55E+05		7.67E+05		7.75E+05
# 10,000 gal tank		4.8		23		23
	pCi/g (dry)	pCi/g (dry)	Curies	Curies	pCi/g	Curies
Gross alpha	1.07E+02	1.74E+02	7.42E-03	1.44E-02	8.34E+01	2.03E-02
Gross beta	2.87E+02	5.46E+02	2.33E-02	3.87E-02	2.24E+02	4.03E-02
U-234	1.03E+02	1.03E+02	4.41E-03	8.12E-03	4.69E+01	1.17E-02
U-235	2.91E+00	2.91E+00	1.24E-04	2.40E-04	1.39E+00	3.49E-04
U-238	1.19E+02	1.19E+02	5.09E-03	8.50E-03	4.91E+01	1.25E-02
Am-241	1.93E+00	1.93E+00	8.22E-05	1.81E-04	1.05E+00	2.83E-04
Pu-239	6.33E+00	6.33E+00	2.70E-04	8.00E-04	4.62E+00	1.05E-03
Total Specific Isotopes						
Sum of Gross						

By <u>UCStalk</u>	Date <u>2/1/93</u>	Chk. By <u>Boyd</u>	Date <u>12-15-93</u>			
		37854	Release Fraction =	1.09E-06		
		Liters	Local Volume (cubic meters) =	1.00E+03		
	Conservative	10,000 Gal.	A + B mix	A + B mix	A + B mix	10,000 Gal.
	Estimate	Tank	Release	Worker	Safety	Tank
Analyte	A/B Sludge	A + B mix	Inventory	Exposure	Fraction	A/B Sludge
	mg/kg	KG	mg	mg/m3	TWA/Exp	KG
1,1,1-Trichloroethane	1.59E-04	2.77E-05	3.02E-05	3.02E-08	1.58E-11	1.21E-06
Trichlorotrifluoroethane	1.72E-03	3.00E-04	3.27E-04	3.27E-07	0.00E+00	1.31E-05
Tetrachloroethylene	6.08E-02	6.88E-04	7.50E-04	7.50E-07	2.21E-09	4.63E-04
Trichloroethylene	1.92E-04	3.34E-05	3.65E-05	3.65E-08	1.36E-10	1.46E-06
Aluminum	3.17E+03	5.88E+01	6.41E+01	6.41E-02	3.20E-02	2.41E+01
Arsenic	1.02E+01	1.06E-01	1.16E-01	1.16E-04	5.79E-04	7.78E-02
Barium	1.22E+02	1.26E+00	1.38E+00	1.38E-03	2.75E-03	9.27E-01
Beryllium	4.09E+00	4.09E-01	4.46E-01	4.46E-04	2.23E-01	3.12E-02
Boron	8.56E+01	6.08E-01	6.63E-01	6.63E-04	6.63E-04	6.52E-01
Cadmium	6.22E+01	5.64E+00	6.15E+00	6.15E-03	1.23E-01	4.74E-01
Calcium	1.87E+05	1.21E+03	1.32E+03	1.32E+00	1.32E-01	1.43E+03
Chromium	6.83E+01	3.00E+00	3.28E+00	3.28E-03	6.55E-02	5.20E-01
Copper	6.43E+01	2.23E+00	2.44E+00	2.44E-03	2.44E-03	4.89E-01
Iron	3.53E+03	4.17E+01	4.55E+01	4.55E-02	4.55E-02	2.69E+01
Lead	2.10E+01	4.21E-01	4.59E-01	4.59E-04	3.06E-03	1.60E-01
Magnesium	7.51E+03	6.18E+01	6.74E+01	6.74E-02	6.74E-03	5.72E+01
Manganese	1.04E+02	9.13E-01	9.96E-01	9.96E-04	1.99E-04	7.95E-01
Mercury	1.82E+00	1.89E-01	2.06E-01	2.06E-04	2.06E-02	1.38E-02
Nickel	7.13E+00	4.49E-01	4.90E-01	4.90E-04	4.90E-04	5.43E-02
Potassium	5.24E+03	4.50E+01	4.90E+01	4.90E-02	2.45E-02	3.99E+01
Silicon	2.95E+03	4.25E+01	4.63E+01	4.63E-02	4.63E-03	2.25E+01
Silver	4.32E+00	2.44E-01	2.66E-01	2.66E-04	2.66E-02	3.29E-02
Sodium	1.41E+04	1.08E+02	1.17E+02	1.17E-01	5.87E-02	1.07E+02
Strontium	7.10E+02	5.13E+00	5.59E+00	5.59E-03	5.59E-04	5.41E+00
Thallium	4.14E+00	2.49E-02	2.71E-02	2.71E-05	2.71E-04	3.16E-02
Zinc	1.30E+02	1.54E+00	1.67E+00	1.67E-03	1.67E-04	9.90E-01
Chloride	6.15E+03	3.74E+01	4.08E+01	4.08E-02	0.00E+00	4.68E+01
Cyanide	1.17E+01	7.21E-02	7.86E-02	7.86E-05	1.57E-05	8.91E-02
Sulfate	5.32E+03	3.24E+01	3.53E+01	3.53E-02	0.00E+00	4.05E+01
Nitrite	1.13E+03	6.78E+00	7.39E+00	7.39E-03	0.00E+00	8.59E+00
Nitrate	2.47E+04	1.49E+02	1.63E+02	1.63E-01	0.00E+00	1.88E+02
PO4---	1.06E+01	6.37E-02	6.94E-02	6.94E-05	0.00E+00	8.07E-02
Sulfide	2.16E+01	1.30E-01	1.41E-01	1.41E-04	0.00E+00	1.64E-01
Phosphorus	7.72E+02	4.64E+00	5.06E+00	5.06E-03	0.00E+00	5.88E+00
Ammonia	1.74E+02	1.09E+00	1.19E+00	1.19E-03	6.98E-05	1.33E+00
Nitrogen(TKN)	7.57E+03	4.55E+01	4.96E+01	4.96E-02	0.00E+00	5.77E+01
TOC	1.53E+04	1.08E+02	1.18E+02	1.18E-01	0.00E+00	1.17E+02
Grand Total	2.87E+05	1.97E+03	2.15E+03	2.15E+00	7.74E-01	2.18E+03
% Solids		14.7				18.4
Sludge, Liters		3.79E+04				3.79E+04
Specific grav.		1.07E+00				1.10E+00
Sludge, Kg (Wet)		4.06E+04	4.43E+04	4.43E+01		4.15E+04
Sludge, Kg (Dry)		5.97E+03	6.51E+03	6.51E+00	6.51E-01	7.62E+03
Moisture - Kg		3.46E+04	3.78E+04	3.78E+01		3.39E+04
# 10,000 gal tank		1				1
	pCi/g	Curies	Curies	uCi/cc	Rem CEDE	Curies
Gross alpha	1.17E+02	6.38E-03	6.95E-09	6.95E-12	6.22E-04	8.88E-04
Gross beta	2.32E+02	2.95E-03	3.22E-09	3.22E-12	5.52E-06	1.76E-03
U-234	6.72E+01	3.86E-03	4.20E-09	4.20E-12	6.89E-06	5.11E-04
U-235	2.00E+00	1.17E-04	1.28E-10	1.28E-13	1.94E-07	1.53E-05
U-238	7.15E+01	4.25E-03	4.63E-09	4.63E-12	6.75E-06	5.45E-04
Am-241	1.62E+00	1.07E-04	1.17E-10	1.17E-13	1.08E-05	1.23E-05
Pu-239	6.00E+00	2.73E-04	2.98E-10	2.98E-13	2.66E-05	4.57E-05
Total Specific Isotopes					5.12E-05	
Sum of Gross					6.27E-04	

	By <u>AC Stalla</u>	Date <u>12/15/93</u>	Chk. By <u>Ray</u>	Date <u>12/15/93</u>		
					Release Fr = 1.09E-06	
					3430	Truck
	A/B Sludge	A/B Sludge	A/B Sludge		Gallon	A + B mix
	Release	Worker	Safety		Truck	Release
Analyte	Inventory	Exposure	Fraction		A + B mix	Inventory
	mg	mg/m3	TWA/Exp		KG	mg
1,1,1-Trichloroethane	1.32E-06	1.32E-09	6.90E-13		2.77E-05	3.02E-05
Trichlorotrifluoroethane	1.43E-05	1.43E-08	0.00E+00		3.00E-04	3.27E-04
Tetrachloroethylene	5.04E-04	5.04E-07	1.49E-09		4.56E-04	4.97E-04
Trichloroethylene	1.59E-06	1.59E-09	5.92E-12		3.34E-05	3.65E-05
Aluminum	2.63E+01	2.63E-02	1.31E-02		4.72E+01	5.15E+01
Arsenic	8.48E-02	8.48E-05	4.24E-04		6.69E-02	7.29E-02
Barium	1.01E+00	1.01E-03	2.02E-03		7.94E-01	8.65E-01
Beryllium	3.40E-02	3.40E-05	1.70E-02		4.02E-01	4.38E-01
Boron	7.11E-01	7.11E-04	7.11E-04		2.73E-01	2.97E-01
Cadmium	5.16E-01	5.16E-04	1.03E-02		5.52E+00	6.02E+00
Calcium	1.56E+03	1.56E+00	1.56E-01		4.70E+02	5.12E+02
Chromium	5.67E-01	5.67E-04	1.13E-02		2.80E+00	3.05E+00
Copper	5.34E-01	5.34E-04	5.34E-04		2.02E+00	2.21E+00
Iron	2.93E+01	2.93E-02	2.93E-02		2.83E+01	3.08E+01
Lead	1.74E-01	1.74E-04	1.16E-03		3.45E-01	3.76E-01
Magnesium	6.23E+01	6.23E-02	6.23E-03		3.26E+01	3.55E+01
Manganese	8.66E-01	8.66E-04	1.73E-04		5.08E-01	5.54E-01
Mercury	1.51E-02	1.51E-05	1.51E-03		1.86E-01	2.03E-01
Nickel	5.92E-02	5.92E-05	5.92E-05		4.31E-01	4.69E-01
Potassium	4.35E+01	4.35E-02	2.17E-02		2.46E+01	2.68E+01
Silicon	2.45E+01	2.45E-02	2.45E-03		3.14E+01	3.42E+01
Silver	3.58E-02	3.58E-05	3.58E-03		2.32E-01	2.53E-01
Sodium	1.17E+02	1.17E-01	5.85E-02		5.26E+01	5.73E+01
Strontium	5.89E+00	5.89E-03	5.89E-04		2.34E+00	2.55E+00
Thallium	3.44E-02	3.44E-05	3.44E-04		8.55E-03	9.32E-03
Zinc	1.08E+00	1.08E-03	1.08E-04		1.04E+00	1.13E+00
Chloride	5.10E+01	5.10E-02	0.00E+00		1.31E+01	1.43E+01
Cyanide	9.71E-02	9.71E-05	1.94E-05		2.60E-02	2.83E-02
Sulfate	4.42E+01	4.42E-02	0.00E+00		1.14E+01	1.25E+01
Nitrite	9.36E+00	9.36E-03	0.00E+00		2.33E+00	2.54E+00
Nitrate	2.05E+02	2.05E-01	0.00E+00		5.18E+01	5.65E+01
PO4---	8.80E-02	8.80E-05	0.00E+00		2.19E-02	2.38E-02
Sulfide	1.79E-01	1.79E-04	0.00E+00		4.45E-02	4.85E-02
Phosphorus	6.41E+00	6.41E-03	0.00E+00		1.59E+00	1.74E+00
Ammonia	1.45E+00	1.45E-03	8.51E-05		4.01E-01	4.37E-01
Nitrogen(TKN)	6.29E+01	6.29E-02	0.00E+00		1.56E+01	1.70E+01
TOC	1.27E+02	1.27E-01	0.00E+00		4.76E+01	5.19E+01
Grand Total	2.38E+03	2.38E+00	3.37E-01		8.48E+02	9.24E+02
% Solids						
Sludge, Liters					1.30E+04	
Specific grav.					8.56E-01	
Sludge, Kg (Wet)	4.52E+04	4.52E+01			1.11E+04	1.21E+04
Sludge, Kg (Dry)	8.30E+03	8.30E+00			5.41E+02	5.90E+02
Moisture - Kg	3.69E+04	3.69E+01			1.06E+04	1.15E+04
# 10,000 gal tank						
	Curies	uCi/cc	Rem CEDE		Curies	Curies
Gross alpha	9.68E-10	9.68E-13	8.65E-05		6.05E-03	6.60E-09
Gross beta	1.92E-09	1.92E-12	3.30E-06		2.07E-03	2.26E-09
U-234	5.57E-10	5.57E-13	9.14E-07		3.67E-03	4.00E-09
U-235	1.66E-11	1.66E-14	2.52E-08		1.12E-04	1.22E-10
U-238	5.94E-10	5.94E-13	8.65E-07		4.06E-03	4.42E-09
Am-241	1.35E-11	1.35E-14	1.24E-06		1.03E-04	1.13E-10
Pu-239	4.98E-11	4.98E-14	4.45E-06		2.55E-04	2.78E-10
Total Specific Isotopes			7.50E-06			
Sum of Gross			8.98E-05			

	By <u>Bob Stalk</u>	Date <u>12/18/93</u>	Chk. By <u>Samuel</u>	Date <u>12-18-93</u>	
		X/Q (s/m3)		X/Q (s/m3)	
	Truck	5.15E-02	Truck	2.36E-04	Truck
	A + B mix	Onsite	A + B mix	Maximum	A + B mix
	Safety	Co-located	Safety	Offsite	Safety
Analyte	Fraction	Worker	Fraction	Individual	Fraction
	Exp/TWA	mg/m3	Exp/TWA	mg/m3	Exp/(0.1*TWA)
1,1,1-Trichloroethane	1.58E-11	1.73E-09	9.04E-13	7.91E-12	4.14E-14
Trichlorotrifluoroethane	0.00E+00	1.87E-08	0.00E+00	8.57E-11	0.00E+00
Tetrachloroethylene	1.47E-09	2.84E-08	8.39E-11	1.30E-10	3.84E-12
Trichloroethylene	1.36E-10	2.09E-09	7.75E-12	9.56E-12	3.55E-13
Aluminum	2.57E-02	2.95E-03	1.47E-03	1.35E-05	6.75E-05
Arsenic	3.65E-04	4.17E-06	2.09E-05	1.91E-08	9.56E-07
Barium	1.73E-03	4.95E-05	9.90E-05	2.27E-07	4.54E-06
Beryllium	2.19E-01	2.50E-05	1.25E-02	1.15E-07	5.74E-04
Boron	2.97E-04	1.70E-05	1.70E-05	7.80E-08	7.80E-07
Cadmium	1.20E-01	3.44E-04	6.88E-03	1.58E-06	3.15E-04
Calcium	5.12E-02	2.93E-02	2.93E-03	1.34E-04	1.34E-04
Chromium	6.10E-02	1.74E-04	3.49E-03	7.99E-07	1.60E-04
Copper	2.21E-03	1.26E-04	1.26E-04	5.79E-07	5.79E-06
Iron	3.08E-02	1.76E-03	1.76E-03	8.08E-06	8.08E-05
Lead	2.51E-03	2.15E-05	1.44E-04	9.87E-08	6.58E-06
Magnesium	3.55E-03	2.03E-03	2.03E-04	9.32E-06	9.32E-06
Manganese	1.11E-04	3.17E-05	6.34E-06	1.45E-07	2.91E-07
Mercury	2.03E-02	1.16E-05	1.16E-03	5.32E-08	5.32E-05
Nickel	4.69E-04	2.69E-05	2.69E-05	1.23E-07	1.23E-06
Potassium	1.34E-02	1.53E-03	7.67E-04	7.03E-06	3.52E-05
Silicon	3.42E-03	1.96E-03	1.96E-04	8.97E-06	8.97E-06
Silver	2.53E-02	1.45E-05	1.45E-03	6.64E-08	6.64E-05
Sodium	2.87E-02	3.28E-03	1.64E-03	1.50E-05	7.52E-05
Strontium	2.55E-04	1.46E-04	1.46E-05	6.70E-07	6.70E-07
Thallium	9.32E-05	5.34E-07	5.34E-06	2.44E-09	2.44E-07
Zinc	1.13E-04	6.49E-05	6.49E-06	2.97E-07	2.97E-07
Chloride	0.00E+00	8.20E-04	0.00E+00	3.76E-06	0.00E+00
Cyanide	5.66E-06	1.62E-06	3.24E-07	7.43E-09	1.49E-08
Sulfate	0.00E+00	7.14E-04	0.00E+00	3.27E-06	0.00E+00
Nitrite	0.00E+00	1.45E-04	0.00E+00	6.65E-07	0.00E+00
Nitrate	0.00E+00	3.23E-03	0.00E+00	1.48E-05	0.00E+00
PO4---	0.00E+00	1.36E-06	0.00E+00	6.25E-09	0.00E+00
Sulfide	0.00E+00	2.78E-06	0.00E+00	1.27E-08	0.00E+00
Phosphorus	0.00E+00	9.94E-05	0.00E+00	4.55E-07	0.00E+00
Ammonia	2.57E-05	2.50E-05	1.47E-06	1.15E-07	6.74E-08
Nitrogen(TKN)	0.00E+00	9.75E-04	0.00E+00	4.47E-06	0.00E+00
TOC	0.00E+00	2.97E-03	0.00E+00	1.36E-05	0.00E+00
Grand Total	6.11E-01	5.29E-02	3.49E-02	2.42E-04	1.60E-03
% Solids					
Sludge, Liters					
Specific grav.					
Sludge, Kg (Wet)					
Sludge, Kg (Dry)					
Moisture - Kg					
# 10,000 gal tank					
	Rem CEDE	uCi/cc	Rem CEDE	uCi/cc	Rem CEDE
Gross alpha	5.90E-04	3.78E-13	3.37E-05	1.73E-15	1.55E-07
Gross beta	3.88E-06	1.29E-13	2.22E-07	5.93E-16	1.02E-09
U-234	6.56E-06	2.29E-13	3.76E-07	1.05E-15	1.72E-09
U-235	1.85E-07	6.98E-15	1.06E-08	3.20E-17	4.86E-11
U-238	6.44E-06	2.53E-13	3.69E-07	1.16E-15	1.69E-09
Am-241	1.04E-05	6.44E-15	5.93E-07	2.95E-17	2.72E-09
Pu-239	2.49E-05	1.59E-14	1.42E-06	7.29E-17	6.52E-09
Total Specific Isotopes	4.84E-05		2.77E-06		1.27E-08
Sum of Gross	5.94E-04		3.40E-05		1.56E-07

Enclosure 1  
SRK-271-93  
Page 33 of 41

By <u>AC Stalker</u> Date <u>12/15/92</u> Chk. By <u>Regal</u> Date <u>2-15-97</u>			
Analyte	TLV-TWA		
	mg/m3		
1,1,1-Trichloroethane	1910		
Trichlorotrifluoroethane			
Tetrachloroethylene	339		
Trichloroethylene	269		
Aluminum	2	as Al soluble salts	
Arsenic	0.2	as As	
Barium	0.5	as Ba	
Beryllium	0.002	as Be	
Boron	1	as borate	
Cadmium	0.05	as Cd	
Calcium	10	as carbonate or silicate	
Chromium	0.05	as Cr (VI)	
Copper	1	as Cu dust & mist	
Iron	1	as Fe soluble salts	
Lead	0.15	as Pb inorg dust & fumes	
Magnesium	10	MgO fume	
Manganese	5	as Mn dust & compounds	
Mercury	0.01	as Hg skin & alkyl compounds	
Nickel	1	as Ni insoluble compounds	
Potassium	2	as KOH	
Silicon	10	precipitated silica	
Silver	0.01	as Ag	
Sodium	2	as NaOH	
Strontium	10	not listed	
Thallium	0.1	as Tl	
Zinc	10	ZnO dust	
Chloride			
Cyanide	5	as CN	
Sulfate			
Nitrite			
Nitrate			
PO4---			
Sulfide			
Phosphorus			
Ammonia	17	as NH3	
Nitrogen(TKN)			
TOC			
Grand Total			
% Solids			
Sludge, Liters			
Specific grav.			
Sludge, Kg (Wet)			
Sludge, Kg (Dry)	10	PNOC	
Moisture - Kg			
# 10,000 gal tank	Class W		
	CEDE	Inhalation	
	Rem/Ci		
Gross alpha	4.30E+08	Assumes all Pu-239	
Gross beta	8.25E+06	Assumes all Pu-241	
U-234	7.89E+06	Class W	
U-235	7.30E+06	Class W	
U-238	7.01E+06	Class w	
Am-241	4.43E+08	Class W	
Pu-239	4.30E+08	Class W	
Total Specific Isotopes			
Sum of Gross			

Enclosure 1  
SRK-271-93  
Page 34 of 41



GENERAL COMPUTATION SHEET

Sheet 23 of 28 Sheets

☐ Calc. No. 93-SAE-004

Subject Hazard Calculations for Early Remediation of Solar Ponds.  
By W. C. Stalker Date 12/8/93 Chk. By W. C. Stalker Date 12/15/93 Orig. ☒ Rev. ☐

2. b. continued

The sludge from Pond A, B North, and B Center has all been pumped into B South. A Pond has had a higher concentration of hazardous material than any of the B ponds, but has a much smaller total volume of sludge. The limiting case for any accident will be the entire contents of A Pond plus any B (mixed) Pond sludge to make up the total volume. The spreadsheet has the mixed B Pond sludge <sup>concentration of each analyte</sup> calculated from the following equation:

$$\text{Conc. B mixed} = \frac{\text{Conc. BN} * \text{Vol BN} + \text{Conc. BC} * \text{Vol BC} + \text{Conc. BS} * \text{Vol BS}}{\text{Vol BN} + \text{Vol BC} + \text{Vol BS}}$$

Results are shown on Page Sheet 18 of this calc.

C. Defline Accidents

The sludge is to be sucked into a "GUZZLER" truck at the solar pond, driven into the tent containing 20 or 22 10000 gallon double walled polyethylene tanks. The truck volume is 3232 gallons of sludge. Two accidents are to be analyzed. Complete spillage of the truck and complete spillage of one 10000 gallon tank inside of the tent.

GENERAL COMPUTATION SHEET

Sheet 24 of 26 Sheets

☐ Calc. No. 93-SAE-004

Subject Hazard Calculations for Early Remediation of Solar Ponds  
By W. Stalk Date 12/8/93 Chk. By [Signature] Date 12-15-93 Orig. ☒ Rev. ☐

d. Tent Configuration on the 750 Pad

Three tents will be utilized to contain the 10000 gallon tanks.

T3 will contain 20 tanks with a free air space of 3133 cubic meters (see page 165 of personal LOG)

T4 will contain 22 tanks with 3360 m<sup>3</sup> free air

T6 will contain 29 tanks with 7555 m<sup>3</sup> free air

For Solar Ponds A/B ~~remediation~~ <sup>remediation</sup> all of the tanks in T3 will be used and the balance will be put into T4. A minimum of 23 tanks will be required.

T3 and T4 will each have one empty tank available to be filled in the event of a leaking or spilled tank. T6 will have two.

3. Hazard Calculation

Material-Risk (MAR) \* Release Fraction (RF) / Air Volume = air concentration  
Local worker

For co-located worker and off site person

$$\frac{\text{MAR} * \text{RF} * \text{TRQ (g/m}^3\text{)}}{\text{duration of release (s)}} = \text{air concentration}$$


d. Release Fraction

NUREG/CR-4658, "Aerosols Generated By Spills of Viscous Solutions and Slurries" was used. A least squares fit of viscosity data vs release fraction was calculated. Sheets 25 & 26 provide the details of the calculation.

Hazard Calculation for Early Remediation of Solar Powders  
 GENERAL COMPUTATION SHEET  
 By AC Stall Date 12/11/93 Chk By Dog Date 12-15-93


# Fraction Airborne from Sucrose and Slurry Spills

NUREG/CR-4658

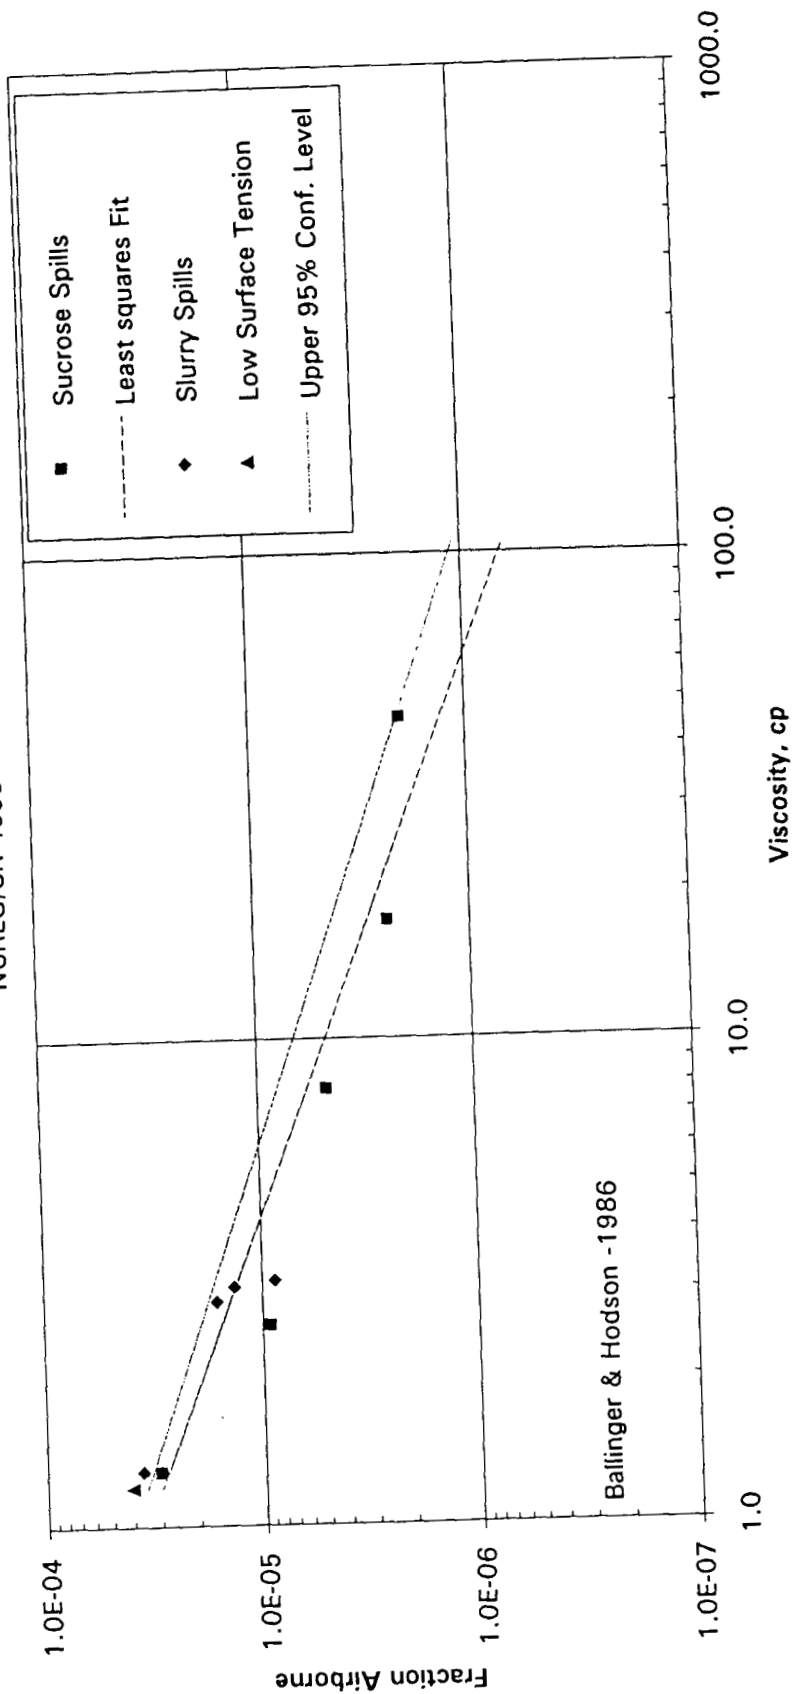

Hazard Calculation for Early Remediation of Solar Pools  
 GENERAL COMPUTATION SHEET  
 By A.C. Stalkin Date 12/16/93 Chk. By B. B. B. Date 12/15/93

Viscosity cp	Fraction Airborne	LOG Viscosity cp	LOG Fraction Airborne	Calculated Fraction Airborne	+ 2 sigma Calculated Fraction Airborne	Regression Analysis m	b	Sucrose	Slurry	Low Surface Tension
1.3	3.0E-05	0.262364264	-10.41098539	2.79E-05	3.29E-05	-0.860537342	-10.26122295	3.0E-05		
2.6	9.2E-06	0.955511445	-11.59030707	1.54E-05	1.92E-05	0.084005488	0.143374146	9.2E-06		
7.9	4.8E-06	2.066862759	-12.24889464	5.90E-06	8.11E-06	0.921008221	0.315630167	4.8E-06		
17.5	2.4E-06	2.862200881	-12.94004182	2.98E-06	4.37E-06	104.935907	9	2.4E-06		
46.0	2.0E-06	3.828641396	-13.12236338	1.30E-06	2.06E-06	10.45396712	0.896601619	2.0E-06		
1.3	3.7E-05	0.262364264	-10.21546232	2.79E-05	3.29E-05			3.7E-05		
1.3	3.0E-05	0.262364264	-10.40766863	2.79E-05	3.29E-05			3.0E-05		
2.9	1.6E-05	1.064710737	-11.04292184	1.40E-05	1.77E-05			1.6E-05		
3.1	1.3E-05	1.131402111	-11.22025585	1.32E-05	1.68E-05			1.3E-05		
3.2	8.7E-06	1.16315081	-11.65218753	1.29E-05	1.64E-05			8.7E-06		
1.2	4.1E-05	0.182321557	-10.10193849	2.99E-05	3.50E-05			4.1E-05		
105.0		4.65396035		6.37E-07	1.09E-06					

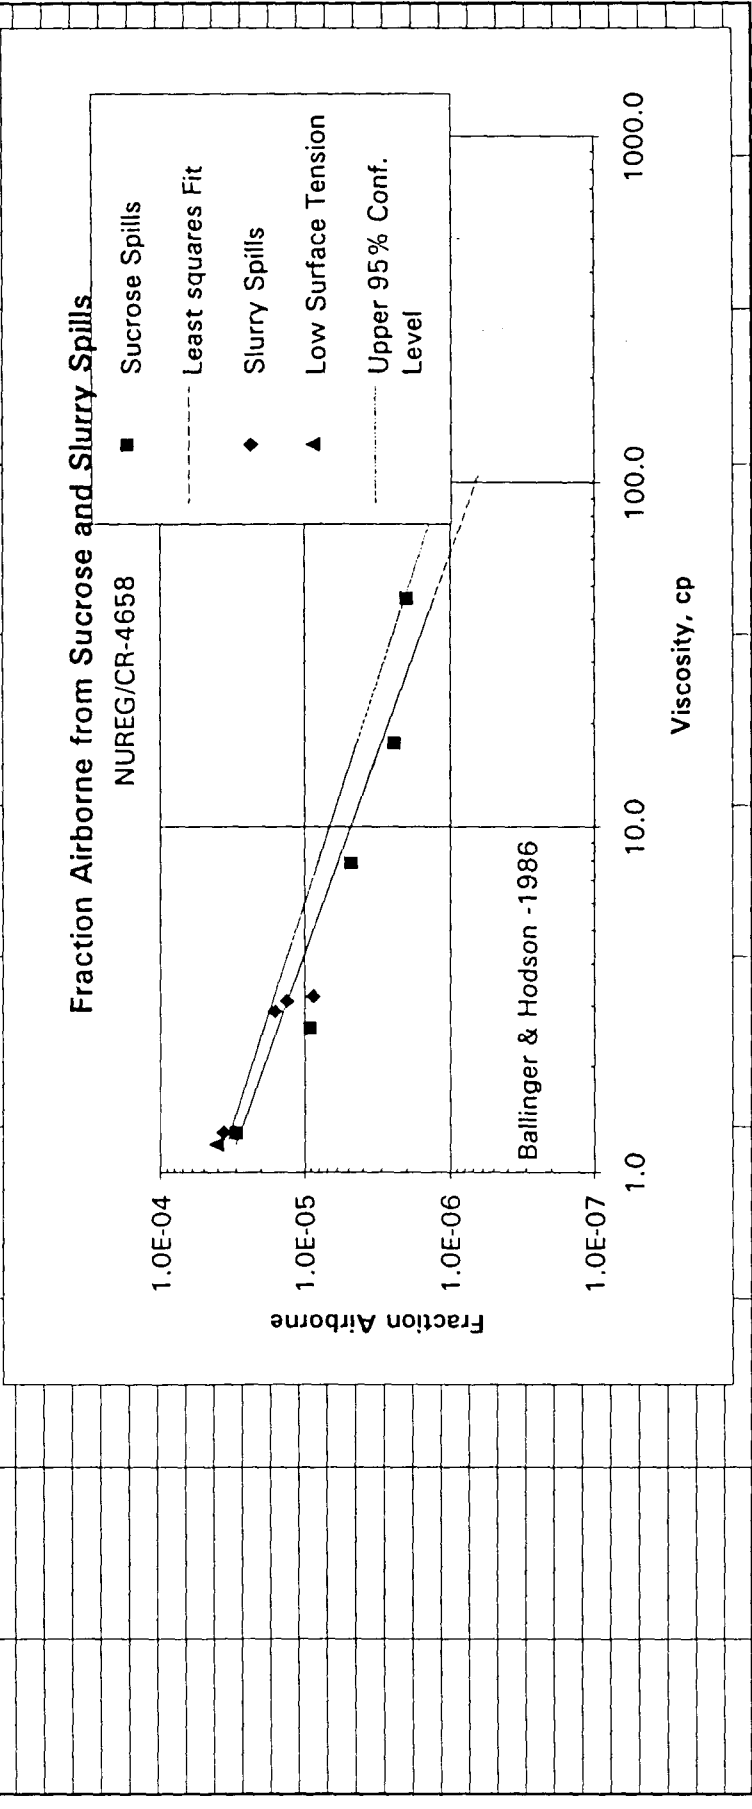

## GENERAL COMPUTATION SHEET

Enclosure 1

SRK-271-93

Page 39 of 41

Sheet 27 of 28 Sheets☐ Calc. No. 93-54E-004

Subject Hazard Calculations for Early Remediation of Solar Panels  
By W. Stalk Date 12/8/93 Chk. By R. P. P. Date 12-15-93 Orig. ☒ Rev. ☐

## 3.2. continued

A fit of the data extrapolated to 105 centigrade at the +95% confidence level gives a value of  $1.09 \times 10^{-6}$  for the release fraction.

b. atmospheric dispersion

1000 m<sup>3</sup> is used for the local volume dispersion for calculation of the local worker dose.

This is ~ 1/3 of the free air volume of tent T3 or T4. This represents a reasonable volume for the evaluation.

For the on-site and off-site evaluation F stability with 1 m/s wind speed meteorology is assumed. This is a conservative assumption. Sheets 19, 20 & 21 contain the calculated exposure concentrations.

c. Toxic Chemical exposure.

The toxic chemical endpoint that is being used in this evaluation is the Threshold Limit Values - Time Weighted Average (TLV-TWA) as published by the American Conference of Governmental Industrial Hygienists (ACGIH).

For the local worker and on-site co-located worker the TLV-TWA is used directly and for the public the endpoint is  $0.1 \times \text{TLV-TWA}$ .

Subject Hazard Calculation for Early Remediation of Solar Ponds  
 By J. C. Stalk Date 12/8/93 Chk. By Boyd Date 12-15-93 Orig. ☒ Rev. ☐

3.c. continued

the calculation is  $\sum_i \frac{\text{conc chemical form } i}{\text{TLV-TWA } i} = \text{Safety Fraction.}$

The fraction is then compared to 1.0.  
 The results are shown on sheets 19, 20, & 21. TLV-TWA are listed on sheet 22.

#### d. Radiological Exposure

All releases are assumed to occur of a 15 minute (900 second) period. The local worker and the public are assumed to be exposed for this 15 minute period. The results of the exposure is given in Rem committed effective dose equivalent (CEDE) to the whole body. Dose conversion factors are taken from ICRP-30. Gross alpha is assumed to be all <sup>239</sup>Pu and gross beta is assumed to be all <sup>241</sup>Pu. Results of the calculation are shown on sheets 19, 20 & 21.

#### 4. Conclusions

The A/B Pond sludge can be safely transported to and stored on the 750 Pad.

**\*\* QA RECORD WHEN COMPLETED \*\***

**NUCLEAR SAFETY ENGINEERING CALCULATION  
GENERAL CHECKING CRITERIA**

Calculation No.: 93-SAE-004 Checked By: Boyd Date: 12-15-93

Title: Hazard Calculation for Early Remediation of  
Solar Ponds

Hand Calculation Checklist:

	<u>Yes</u>	<u>No</u>	<u>N/A</u>	<u>Comments</u>
1. Are analytical methods appropriate?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
2. Are assumptions correct?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
3. Is calculation complete?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
4. Is calculation mathematically accurate?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
5. Do calculational parameters comply with design criteria/dimensions?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
6. Were input data appropriate?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>
7. Does the calculation reference or list applicable assumptions and major equation sources?	<u>✓</u>	<u>  </u>	<u>  </u>	<u>  </u>

Computer Code Checklist:

1. Was an applicable and valid computer program used?*	<u>  </u>	<u>  </u>	<u>✓</u>	<u>  </u>
2. Are assumptions in input correct?	<u>  </u>	<u>  </u>	<u>✓</u>	<u>  </u>
3. Was the input entered correctly?	<u>  </u>	<u>  </u>	<u>✓</u>	<u>  </u>
4. Do the output results seem reasonable?	<u>  </u>	<u>  </u>	<u>✓</u>	<u>  </u>

Additional Comments:

A few errors were found in the spread sheet. The  
typos were corrected and the spread sheet reprinted.

\* When stored on floppy disk; confirm that the controlled working copy of the applicable diskette was checked out.